

JOYOLIGHT

— Linear lighting expert —



2021 Catalog



2021 Catalog

COMPANY PROFILE



Joyolight is an LED and linear lighting expert and manufacturer, providing high quality solutions to our clients since our foundation in 2015. We are proudly Canadian owned and operated, located in Mississauga, Ontario.

Our service concept is based on quality and customer satisfaction first. We offer full service and support from design and specification, right through to delivery and installation.

Our Vision

To lead the industry in linear lighting products and innovation.

Our Mission

To build our business on a strong foundation of quality products and unprecedented customer service and satisfaction.

Our Value

We are a client-centric company that believes in success through satisfied customers and repeat business.

WHY JOYOLIGHT?

Customization

- Consistent illumination with no hot spots or dark spots
- Fully customizable lengths, colors, shapes, CCT, CRI, etc.
- Wide range of available LED tape, including RGBW, D2W, COB, and Neon

High Quality and Certified Products:


- AL6063-T5 double-anodized aluminum profiles
- UV-resistant, and fire-proof lenses.
- LED tape certified by ETL and/or UL
- Drivers Certified by ETL, UL, FCC, DALI
- 5 year warranty

Fast lead time

Stock items and most made-to-order and customized products are produced and shipped directly from our warehouse in Mississauga, Ontario.

Technical Support

- Specification Consultation
- Customized Quotations
- Technical drawings
- Customized installation guides
- Itemized packing/shipping by part/room/etc

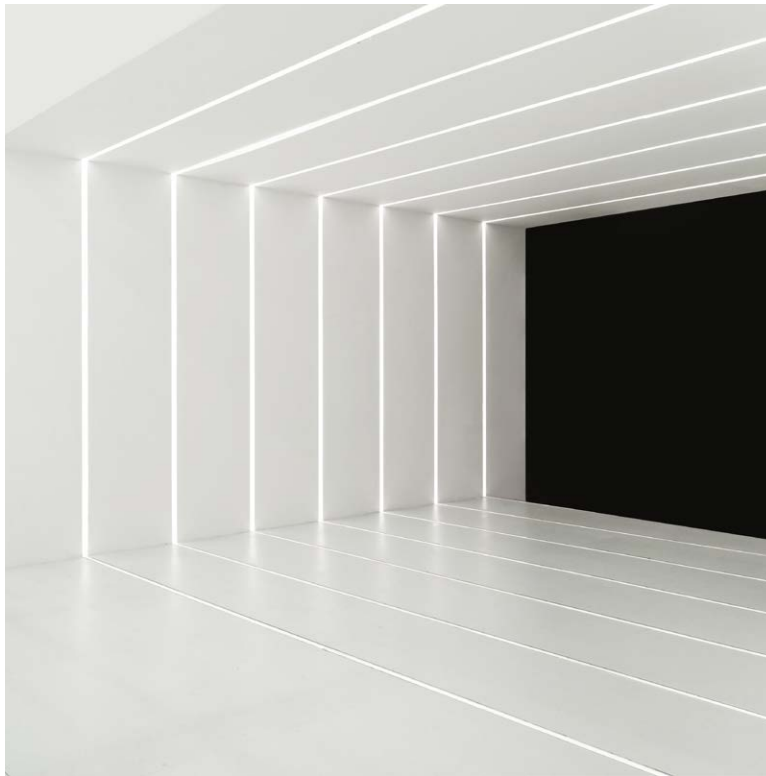

Get in touch with...

JOYOLIGHT

☎ 647-496-8107 (CA); 1-877-849-1942 (US)

▶ www.joyolight.ca

✉ info@joyolight.com

📍 #12, 5200 Dixie Rd, Mississauga, ON, Canada L4W 1E4

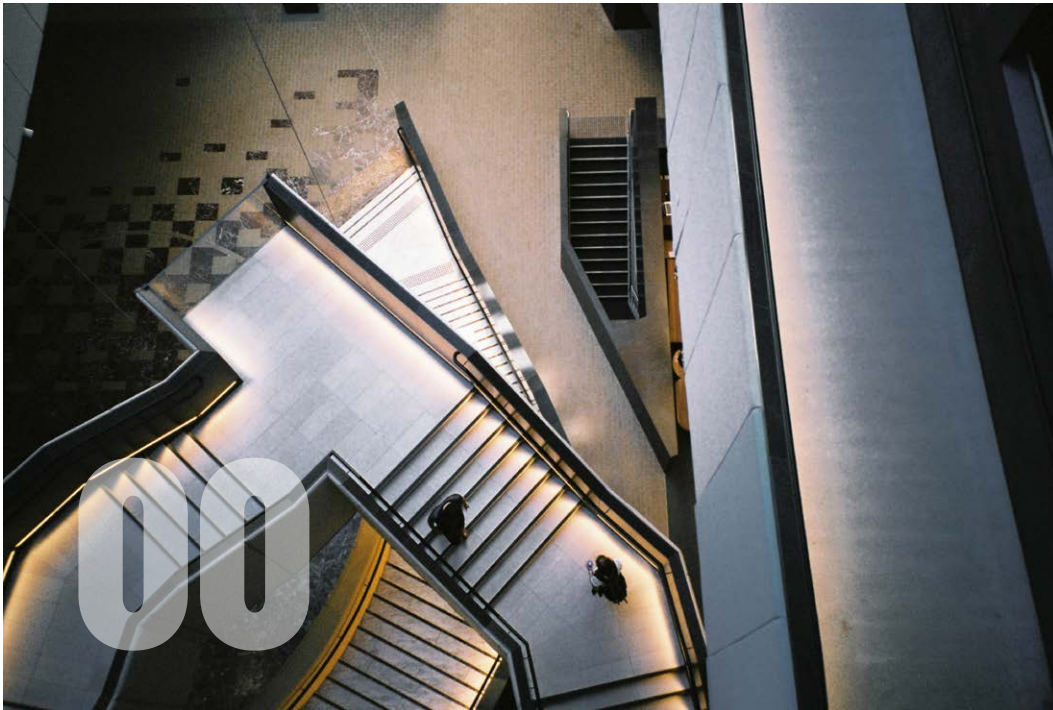


TABLE OF CONTENTS

002

TAPE

Tape.....	002
White.....	003
Colourful.....	009
Tunable.....	015
Ultra.....	019
Special tape.....	027
COB.....	033
Neon.....	037
Accessories.....	049

052

INTEGRATED

Classic.....	058
Creative.....	058

070

FIXTURE

Geometry.....	071
Slim.....	083
Instant.....	097

104

POWER

Dimmable.....	105
Non-dimmable.....	111



TAPE

White

High-efficiency, UL listed flexible LED tape with an array of outputs, color temperatures, and dry, damp, or wet location ratings.



JLS360

IP Level:



CCT:



Accessories:



SMD	3528
LED/m	60
Voltage	24V
Standard Cut	100mm
CRI	80+

Special Order:

- * 2300K, 3500K, 5000K, 6000K available
- * CRI 90+ available



2700K 1.46 W/ft
121 lm/ft
83 lm/W


3000K 1.46 W/ft
128 lm/ft
88 lm/W

4000K 1.46 W/ft
134 lm/ft
92 lm/W



JLS3120


IP Level:



CCT:




Accessories:

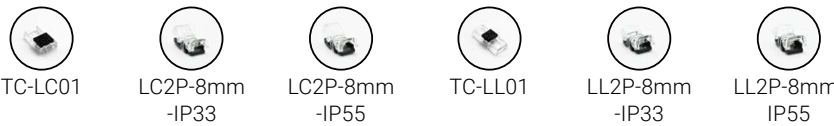

Special Order:

- * 2300K, 3500K, 5000K, 6000K available
- * CRI 90+ available

SMD	3528
LED/m	120
Voltage	24V
Standard Cut	50mm
CRI	80+

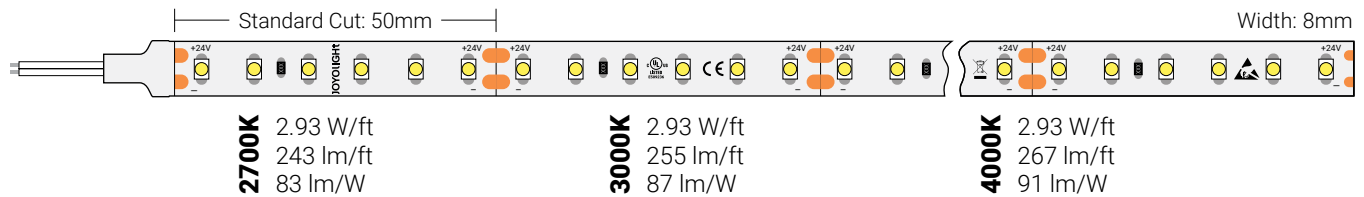



JLS8120


IP Level:



CCT:




Accessories:

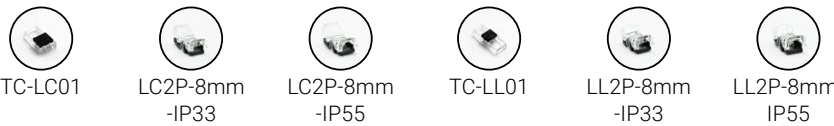

SMD	2835
LED/m	120
Voltage	24V
Standard Cut	50mm
CRI	80+

Special Order:

- * 2300K, 3500K, 5000K, 6000K available
- * CRI 90+ available

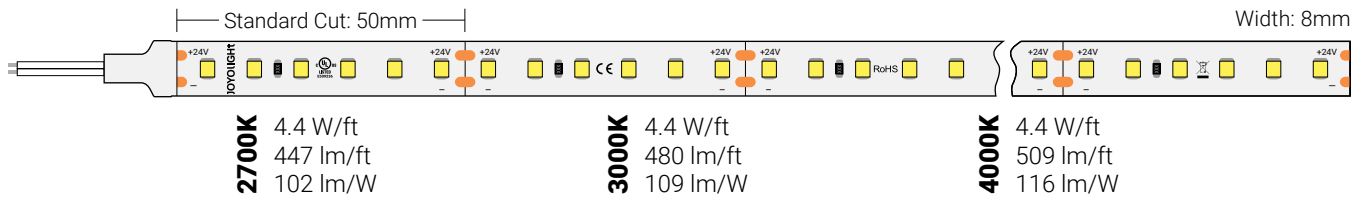



JLS8160HE

High Efficiency LED tape

IP Level:  IP33

CCT:  3000K


Accessories:  LC2P-10mmH -IP33  LL2P-10mmH -IP33

SMD	2835
LED/m	160
Voltage	24V
Standard Cut	50mm
CRI	90+


Special Order:

* IP55 available

* 2700K, 3500K, 4000K, 5000K, 6500K available

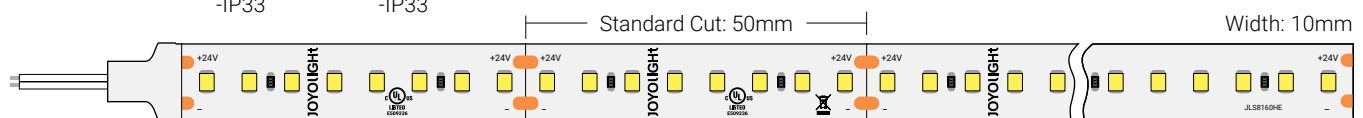


3000K 8.54 W/ft
1014 lm/ft
119 lm/W

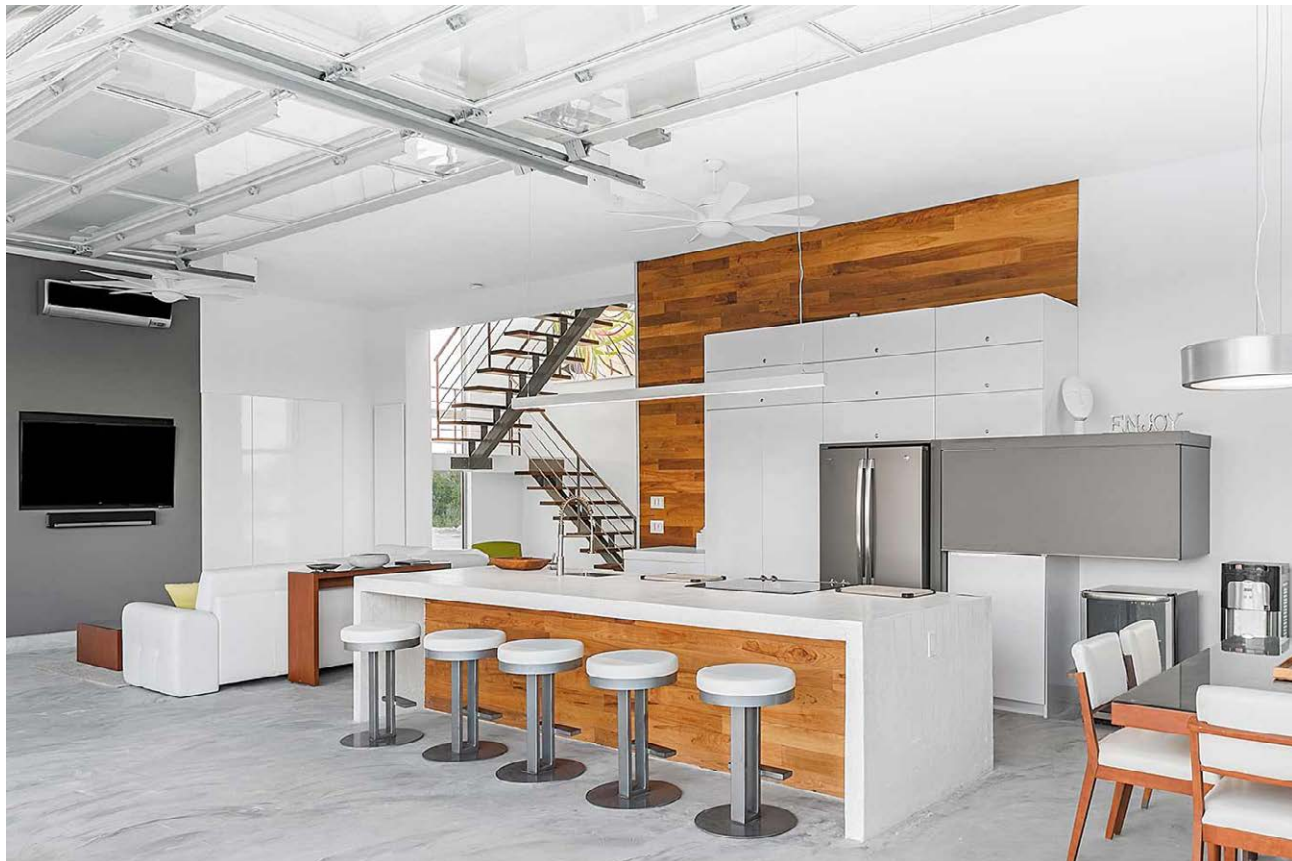


Colourful

UL certified flexible LED tape with the ability to produce bright, vivid colors across the spectrum. Available in dry, damp, or wet location ratings.

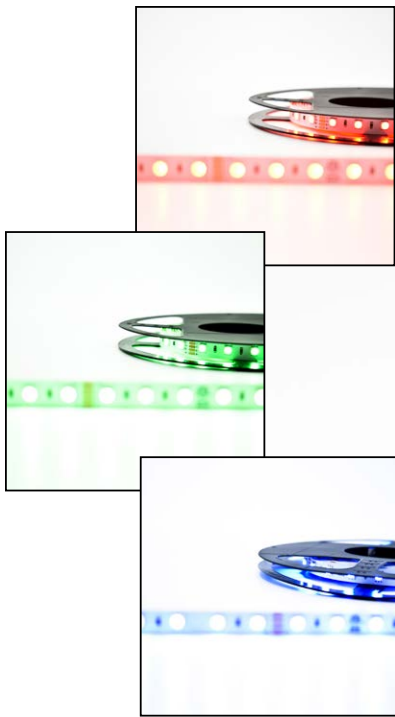

JLS560RGB


IP Level:



Colour:




Accessories:

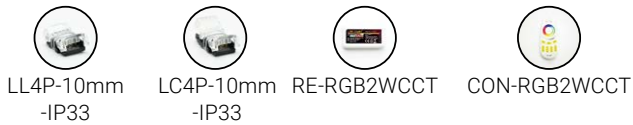

SMD	5050
LED/m	60
Voltage	24V
Standard Cut	100mm

Standard Cut: 100mm Width: 10mm

RGB	Red	Green	Blue
4.39 W/ft 158 lm/ft 36 lm/W	1.46 W/ft 47 lm/ft 32 lm/W	1.46 W/ft 98 lm/ft 67 lm/W	1.46 W/ft 20 lm/ft 14 lm/W

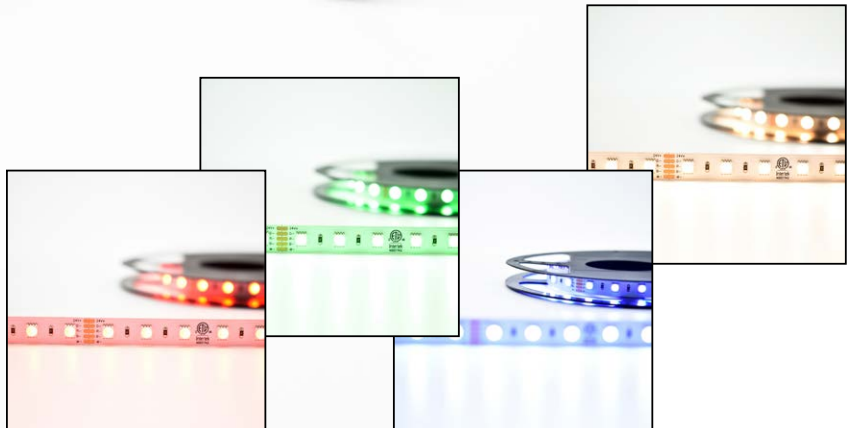

JLS560RGBW


IP Level:



Colour:



Accessories:

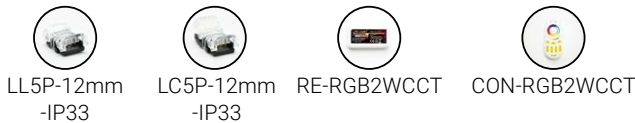


SMD	5050
LED/m	60
Voltage	24V
Standard Cut	100mm
CRI	80+

Special Order:

* RGB+2700K, RGB+6000K available

	Standard Cut: 100mm				Width: 12mm						
RGBW	5.85 W/ft 270 lm/ft 46 lm/W	Red	1.46 W/ft 35 lm/ft 24 lm/W	Green	1.46 W/ft 91 lm/ft 62 lm/W	Blue	1.46 W/ft 27 lm/ft 18 lm/W	3000K	1.46 W/ft 113 lm/ft 77 lm/W	4000K	1.46 W/ft 116 lm/ft 79 lm/W

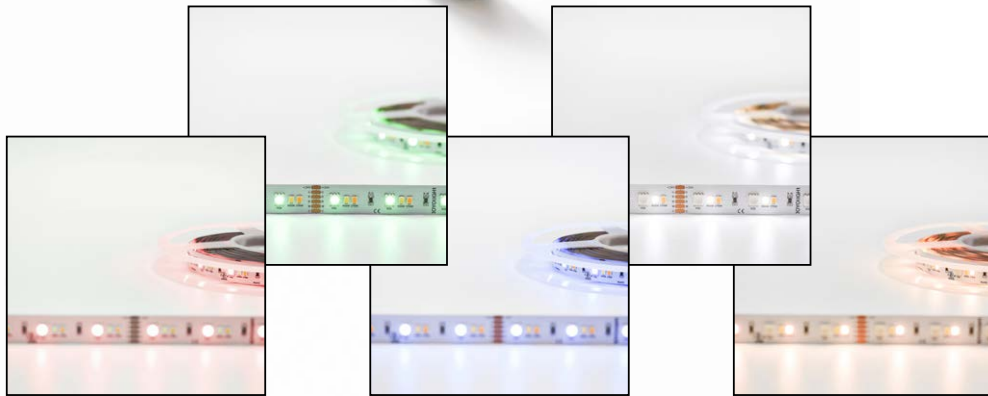

JLS560RGB2W

RGB + 2 White CCT LED tape

IP Level:  IP33

Colour:  RGB + 2700K + 6500K


Accessories:  RE-RGB2WCCT  CON-RGB2WCCT


SMD	5050
LED/m	108=[(1RGB+1W+1W)×36]
Voltage	24V
Standard Cut	166.66mm
CRI	80+

Special Order:
* IP65 (Nano) available



RGB2W 4.39 W/ft
262 lm/ft
60 lm/W

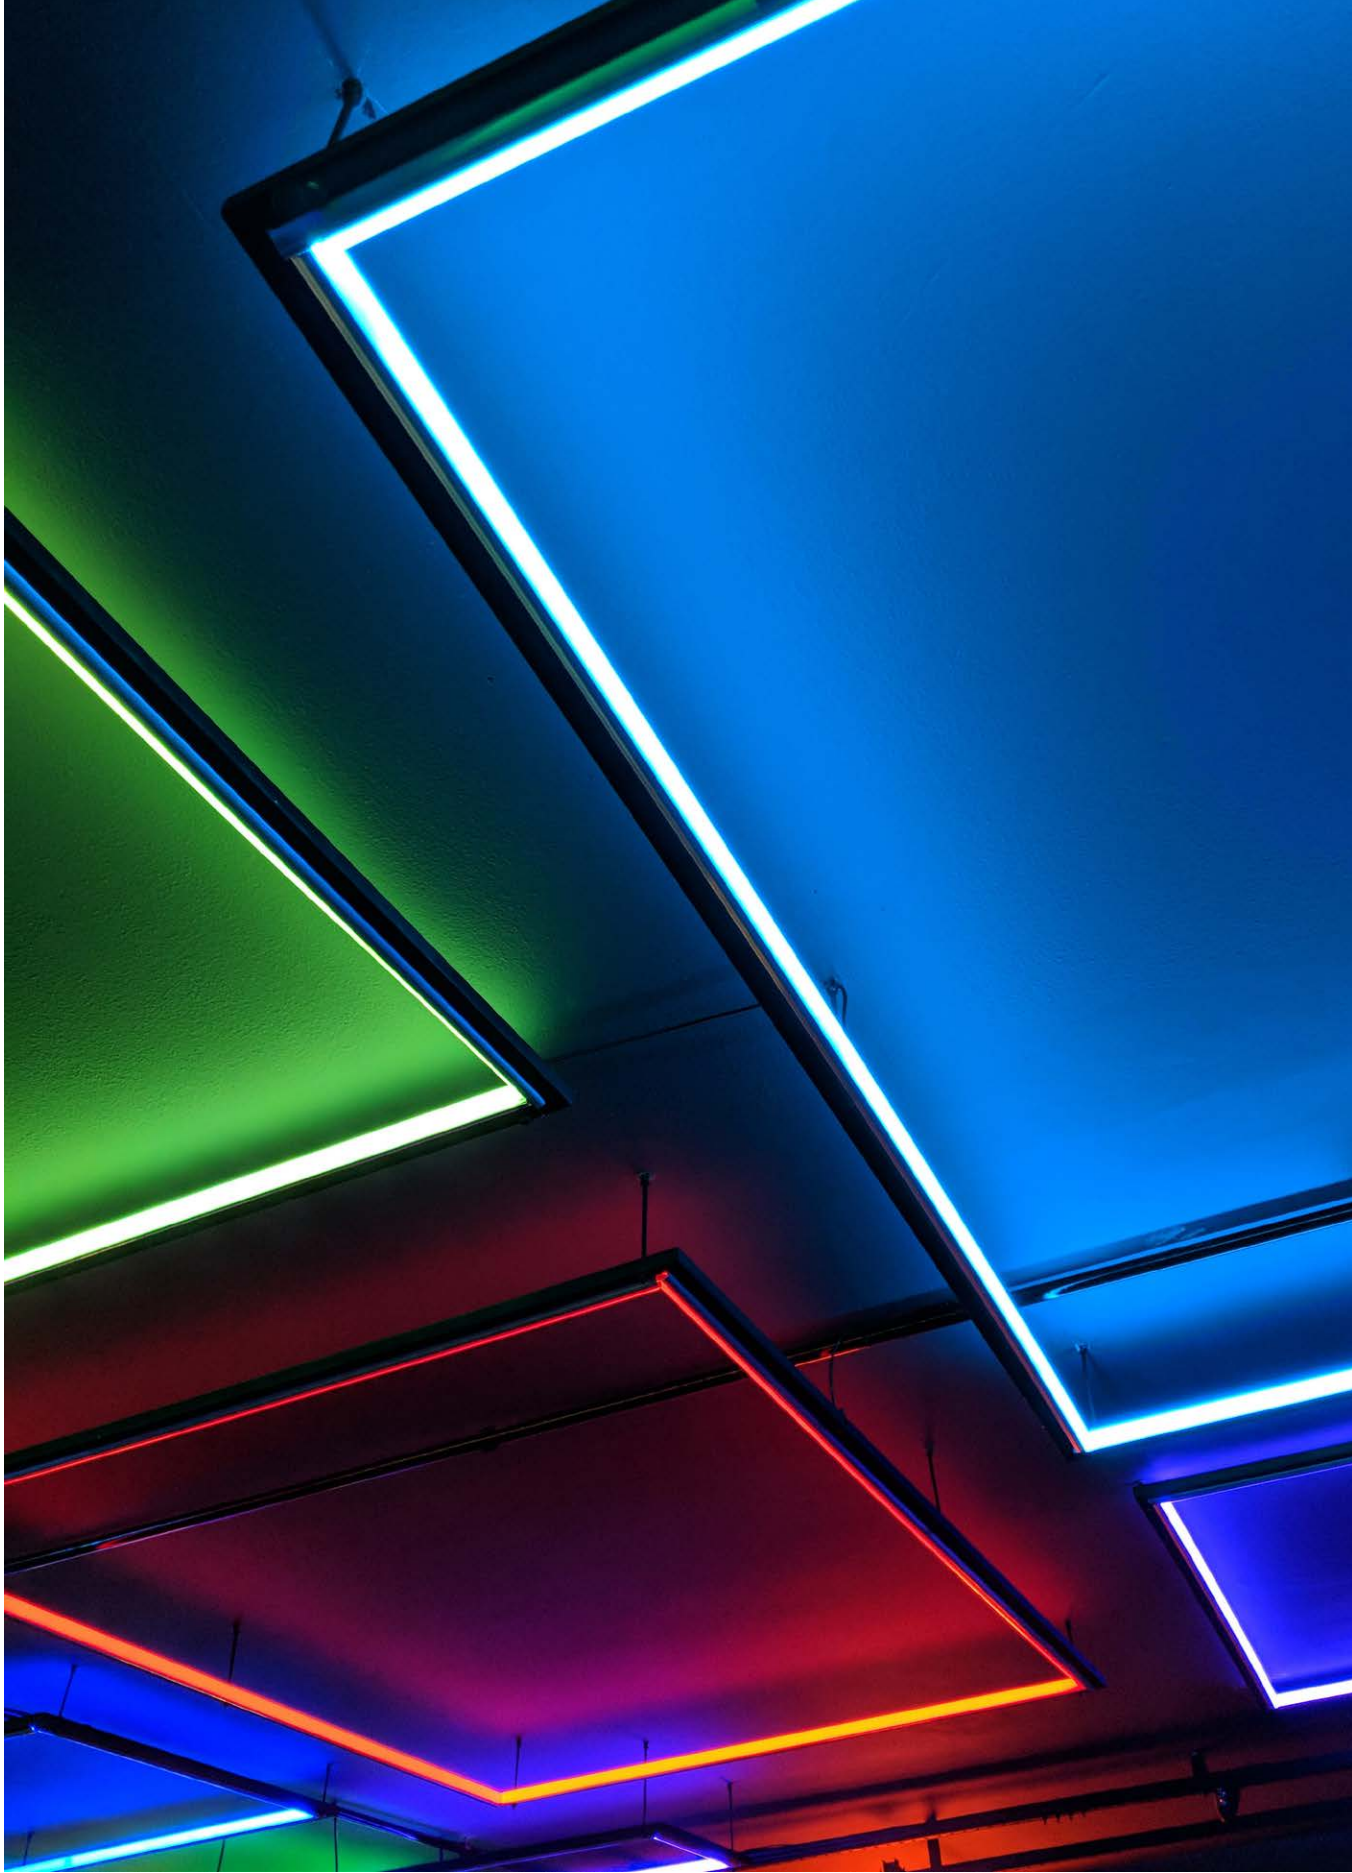

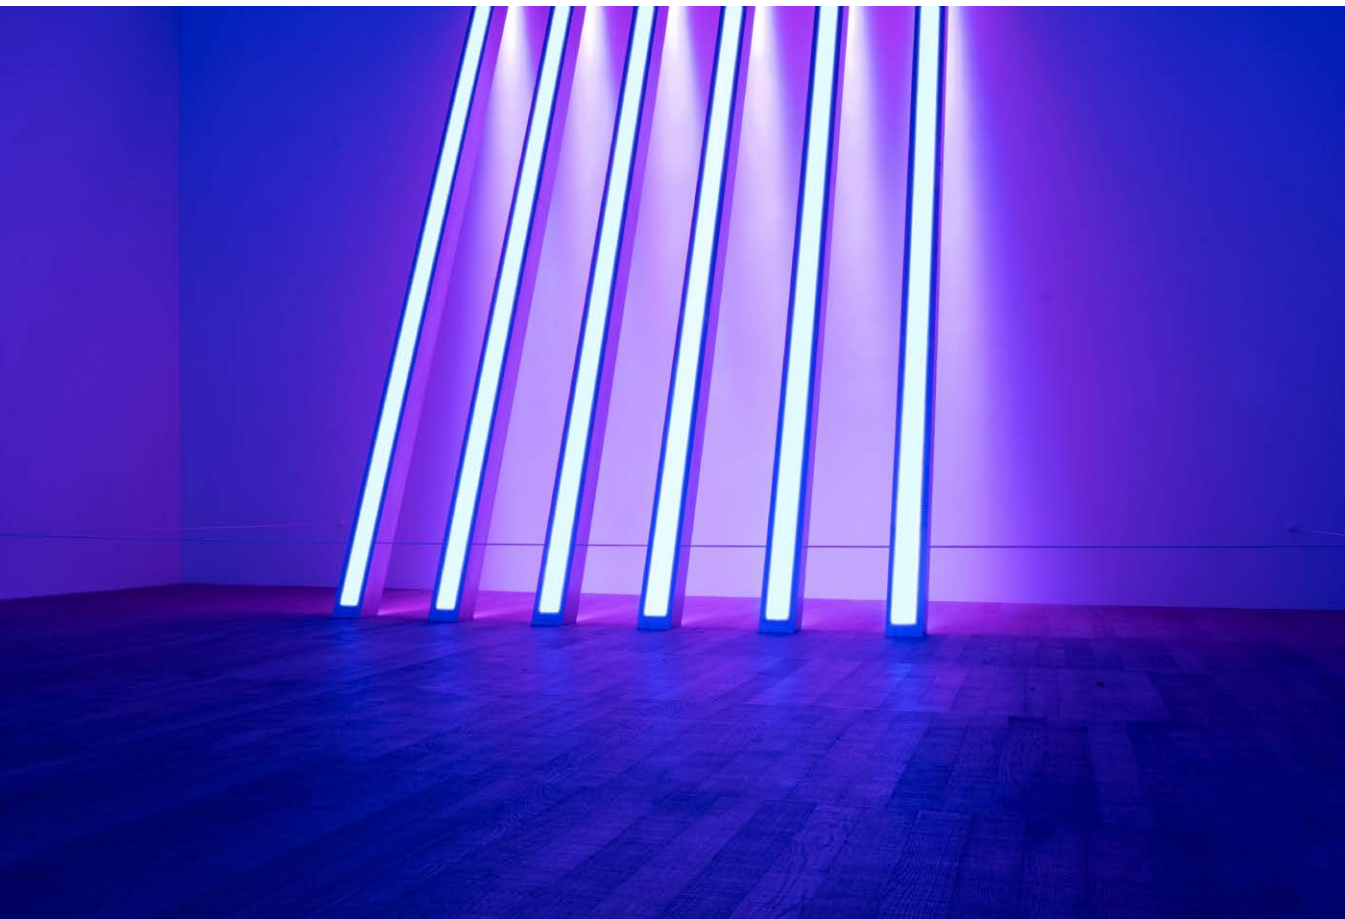


Tunable

Why settle for just one CCT? Our Tunable series includes UL certified flexible LED tape with adjustable color temperatures.



JLS2240CCT

Multi-CCT 2700-6500K LED tape


IP Level:  IP33

Colour:  2700K-6500K


Accessories:  RE-RGB2WCCT  CON-RGB2WCCT

SMD	2216
LED/m	120 + 120
Voltage	24V
Standard Cut	50mm
CRI	90+

Special Order:
* IP65 (Nano) available

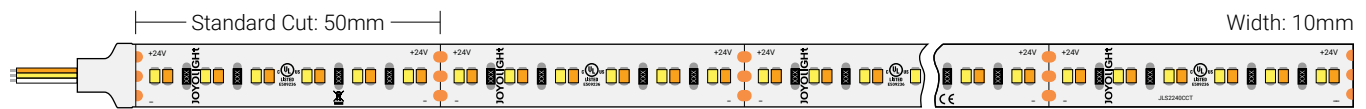

3000K 4.39 W/ft
330 lm/ft
75 lm/W

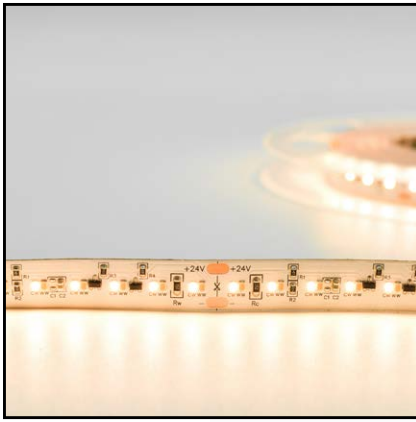


JLS2224D2W

Dim to warm 1800-3000K LED tape

IP Level:



Colour:



Accessories:



LC2P-12mmH-IP33




LL2P-12mmH-IP33


SMD	2216
LED/m	112 + 112
Voltage	24V
Standard Cut	62.5mm
CRI	90+

Special Order:

* IP65 (Nano) available

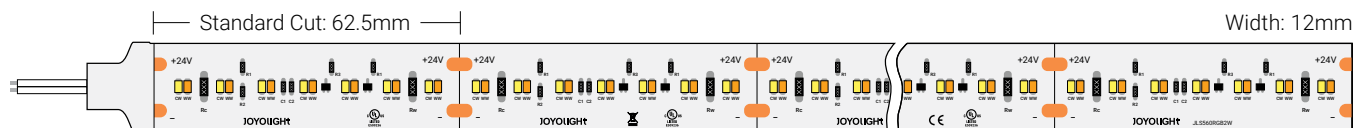


3000K
2.93 W/ft
275 lm/ft
94 lm/W

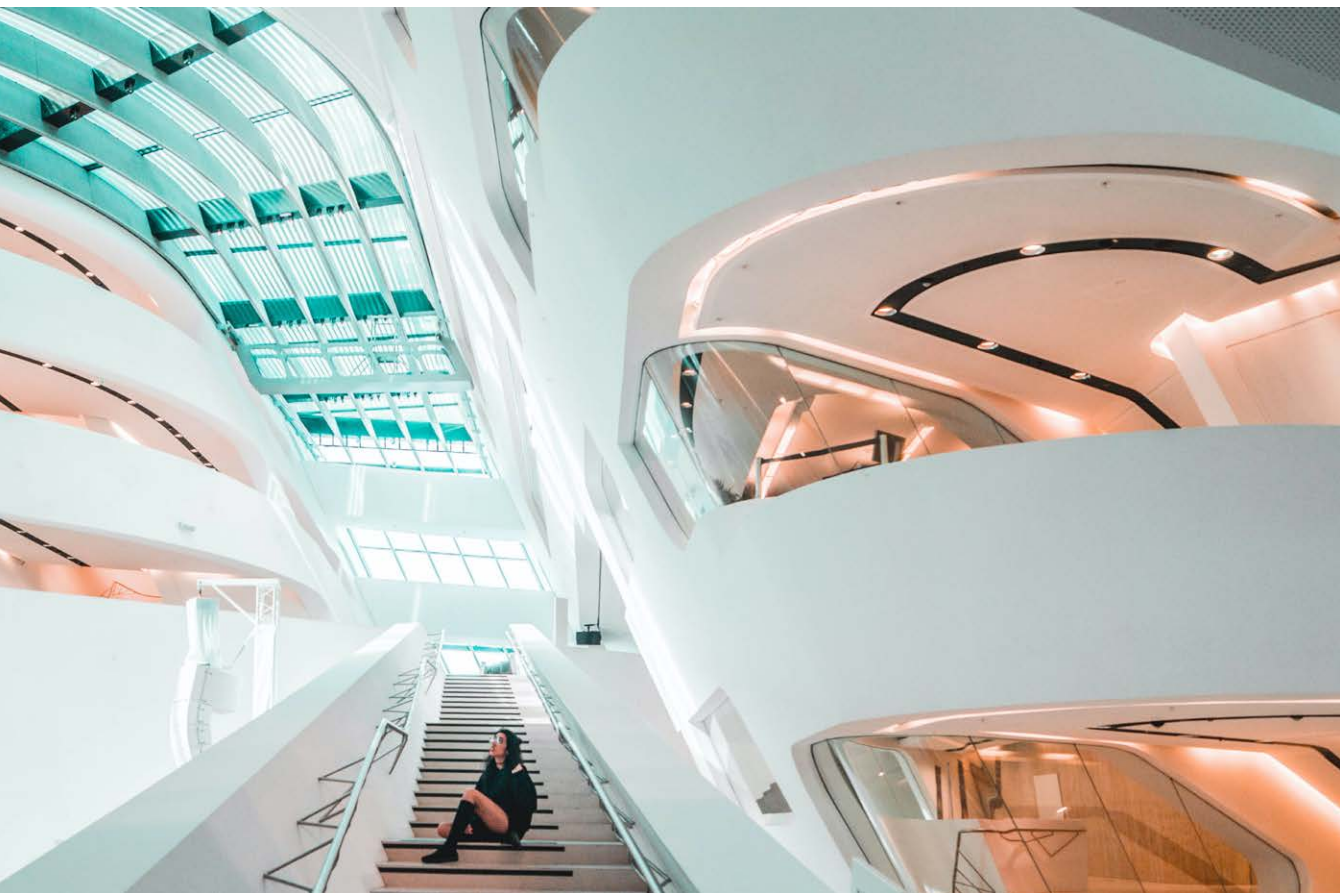

Ultra

Our Ultra series of UL certified flexible LED tape is pushing the boundaries of what LED tape can do.

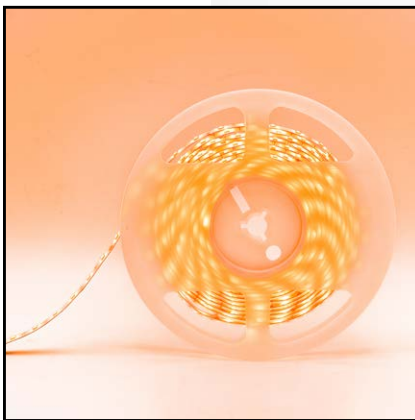

JLS8120UW

Ultra-Warm 1600K LED tape

IP Level:



IP33

Colour:



1600K

Accessories:



LC2P-10mm-IP33




LL2P-10mm-IP33

SMD	2835
LED/m	120
Voltage	24V
Standard Cut	50mm
CRI	80+

Special Order:

- * IP55, IP65 (Nano), IP67, IP68 available
- * 1800K, 2000K, 2200K, 2400K available
- * CRI 90+ available

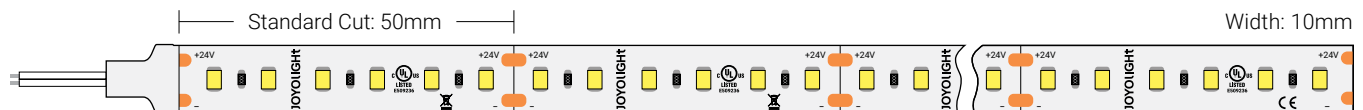

1600K
4.27 W/ft
220 lm/ft
52 lm/W



JLS8120UC

Ultra-Cold 10000K LED tape

IP Level:  IP33


Colour:  10000K

Accessories:  LC2P-10mm-IP33  LL2P-10mm-IP33

SMD	2835
LED/m	120
Voltage	24V
Standard Cut	50mm
CRI	80+

Special Order:

- * IP55, IP65 (Nano), IP67, IP68 available
- * 7500K available
- * CRI 90+ available

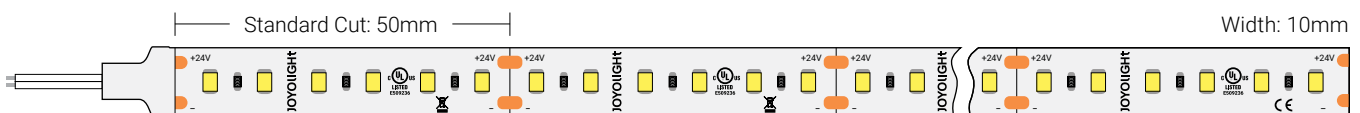

10000K
4.27 W/ft
380 lm/ft
88 lm/W



JLS870UL15

Ultra-Long LED tape (up to 15m, single run, no voltage drop)

IP Level:  IP33


Colour:  3000K

Standard Roll: 60m

SMD	2835
LED/m	70
Voltage	24V
Standard Cut	100mm
CRI	80+

Special Order:

- * IP55, IP67 available
- * 2700K, 3500K, 4000K, 5000K, 6500K available
- * CRI 90+ available

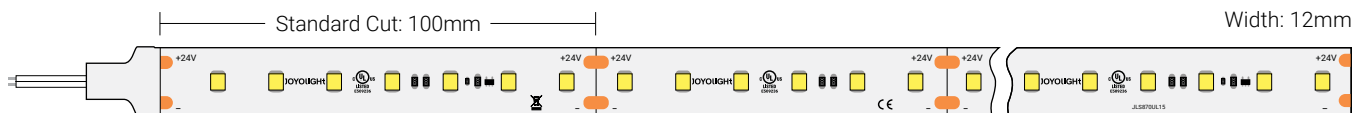

3000K
 1.83 W/ft
 200 lm/ft
 109 lm/W



JLS870UL30

Ultra-Long LED tape (up to 30m, single run, no voltage drop)

IP Level:  IP33


Colour:  3000K

Standard Roll: 60m

SMD	2835
LED/m	70
Voltage	24V
Standard Cut	100mm
CRI	80+

Special Order:

- * IP55, IP67 available
- * 2700K, 3500K, 4000K, 5000K, 6500K available
- * CRI 90+ available

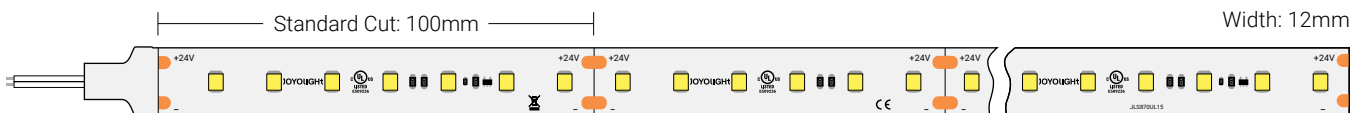

3000K 0.91 W/ft
105 lm/ft
115 lm/W



JLS2238US

Ultra-Silm 4mm LED tape

IP Level:



IP33

Colour:



2700K



3000K



4000K

SMD	2216
LED/m	238
Voltage	24V
Standard Cut	29.4mm
CRI	90+

Special Order:

* 3500K, 5000K, 6500K available

Standard Cut: 29.4mm


Width: 4mm




2700K 2.2 W/ft
193 lm/ft
88 lm/W

3000K 2.2 W/ft
203 lm/ft
92 lm/W

4000K 2.2 W/ft
214 lm/ft
97 lm/W

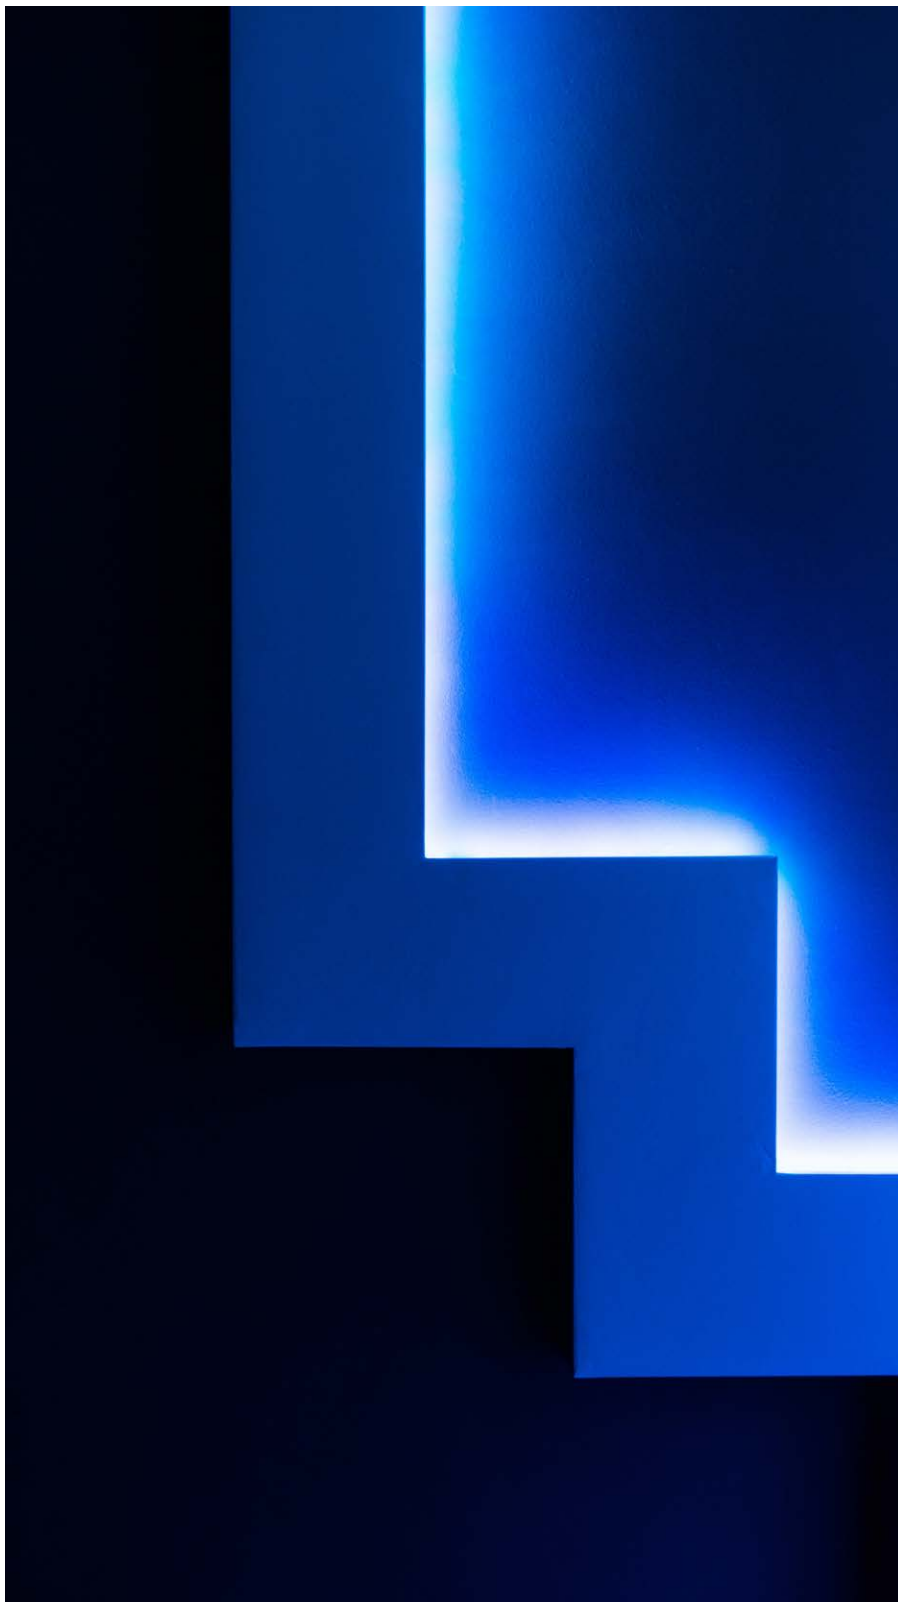


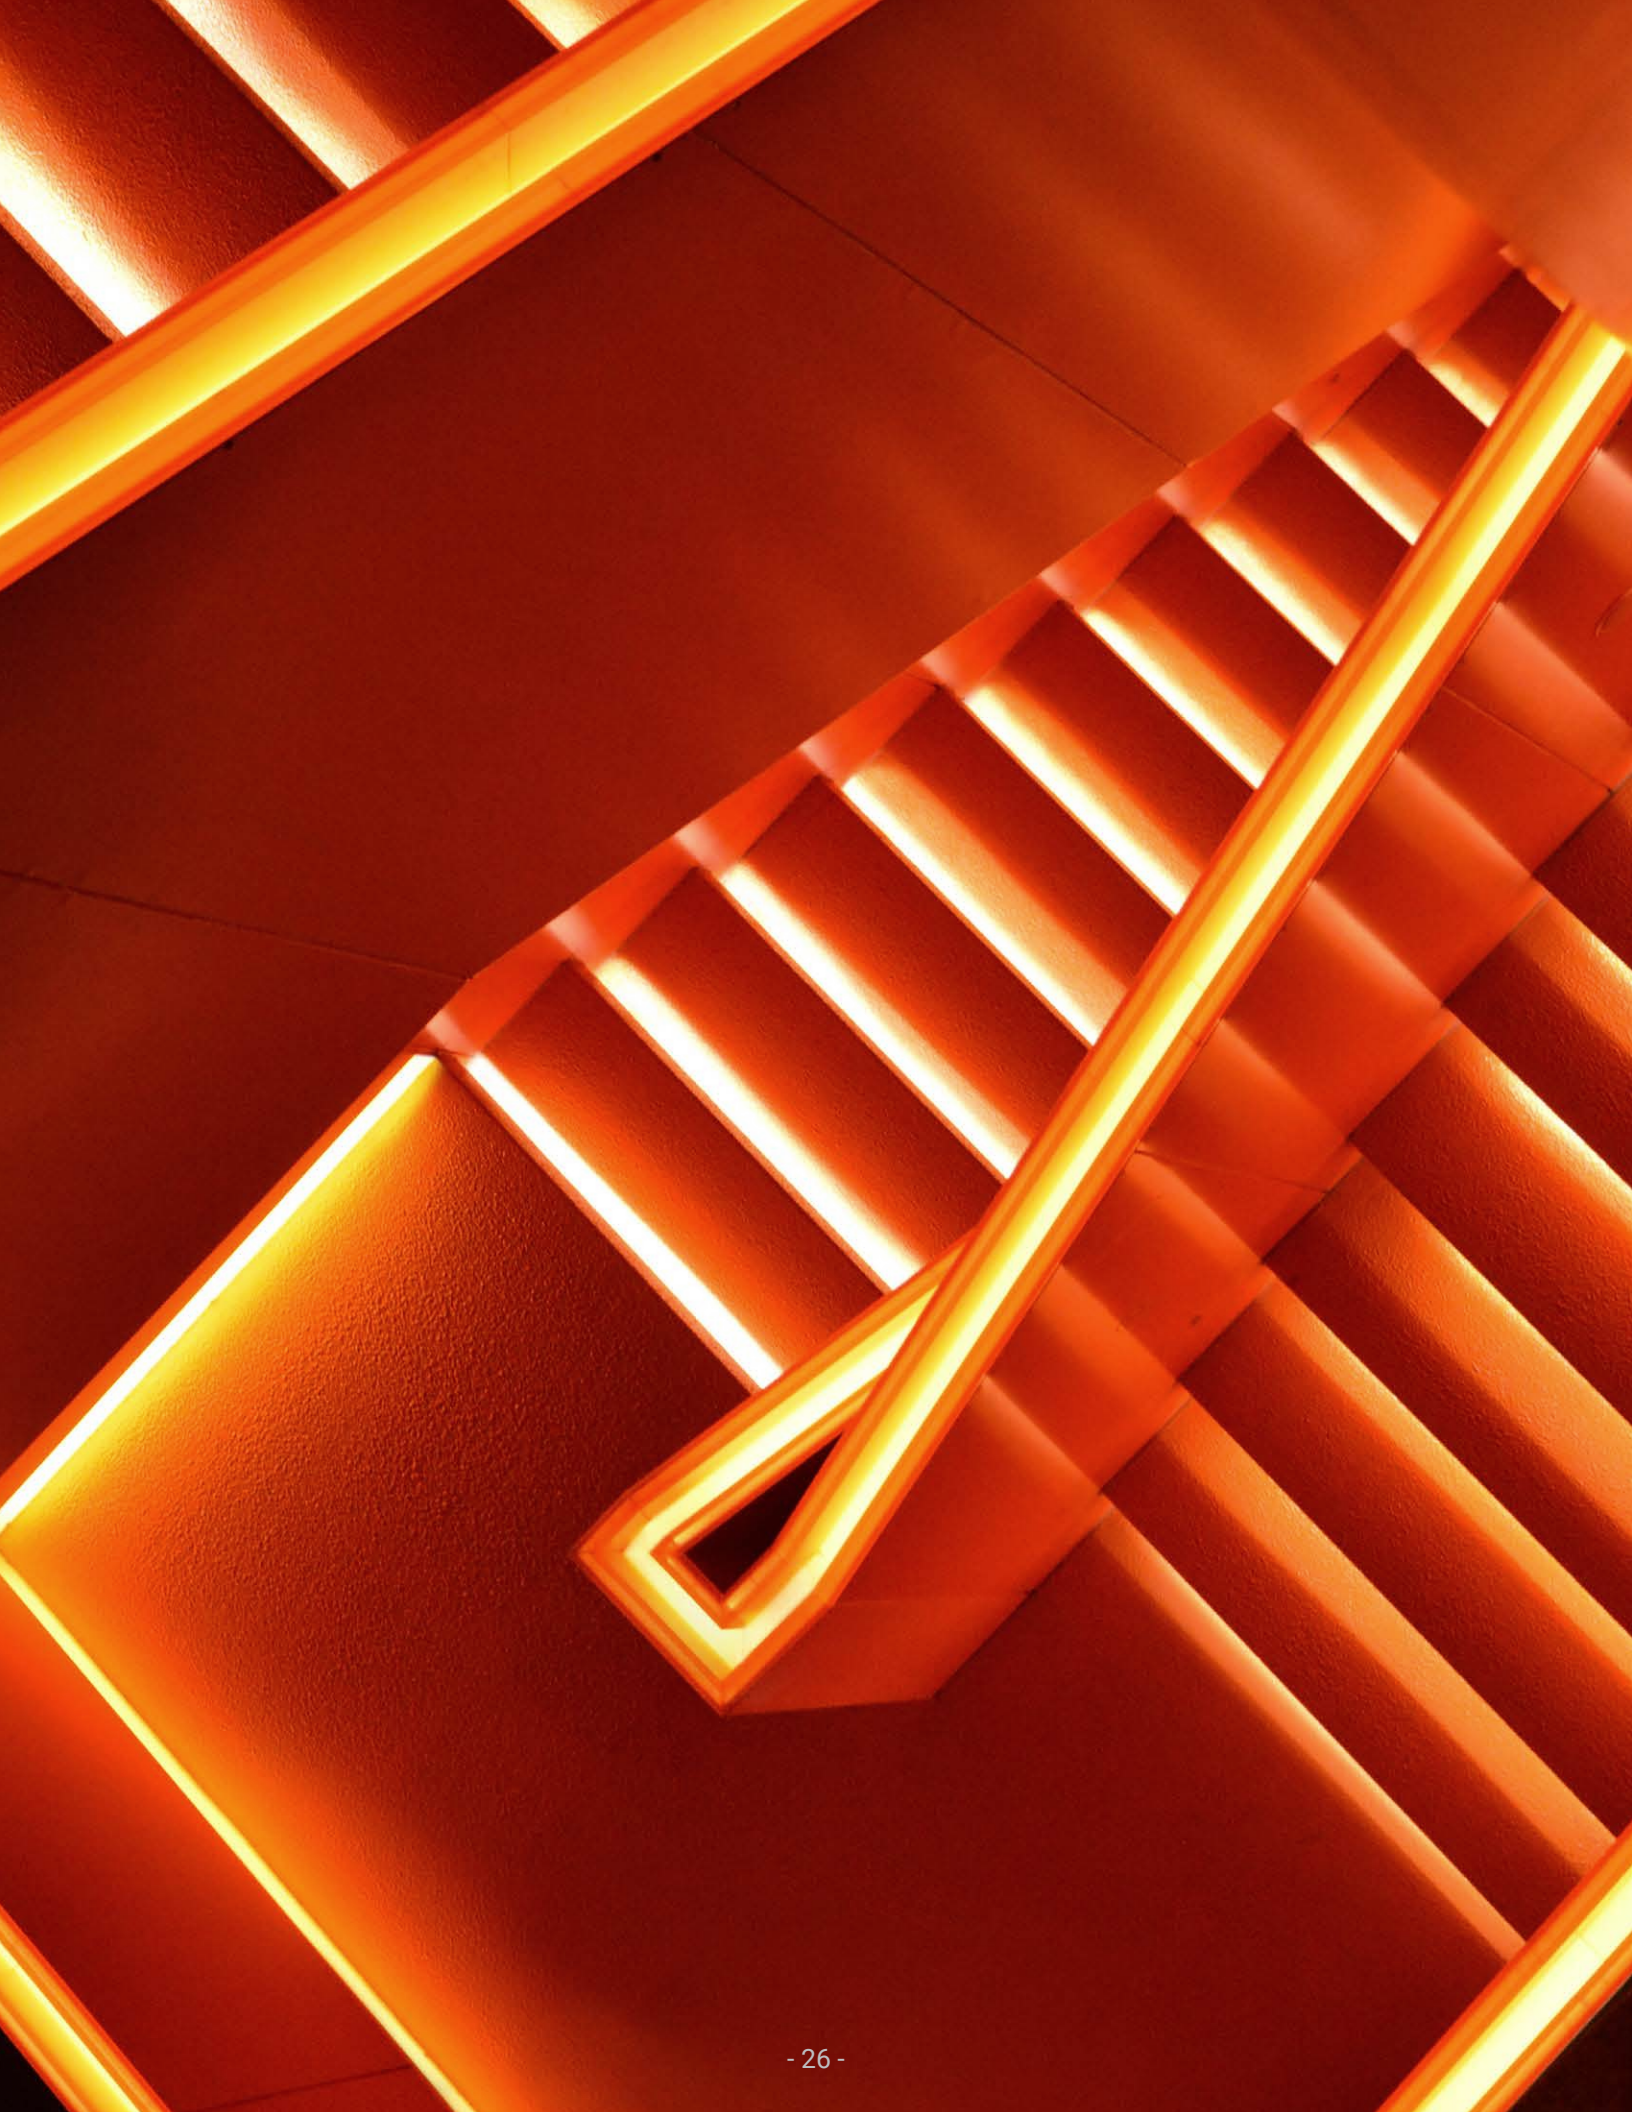



Special Tape

Our Special series of UL certified flexible LED tape offers unique solutions for unique projects.

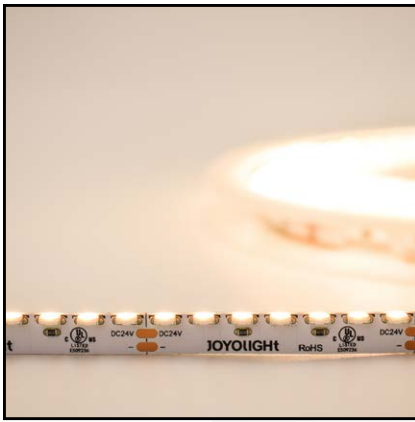

JLS4140SV

Side View LED tape

IP Level:



IP33

Colour:




3000K

SMD	4020
LED/m	140
Voltage	24V
Standard Cut	50mm
CRI	80+

Special Order:

* IP65 (Nano) available

* 2700K, 3500K, 4000K, 5000K, 6500K available

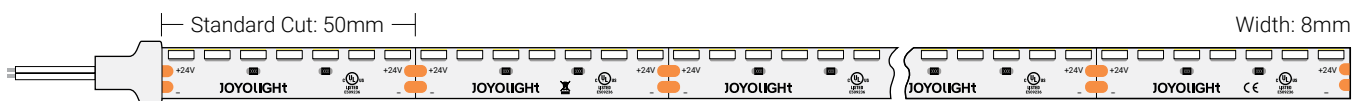

3000K 4.39 W/ft
532 lm/ft
121 lm/W



JLS860BD

Bendable LED tape


IP Level:  IP33

Colour:  3000K

SMD	2835
LED/m	60
Voltage	24V
Standard Cut	100mm
CRI	80+

Special Order:

* 2700K, 3500K, 4000K, 5000K, 6500K available

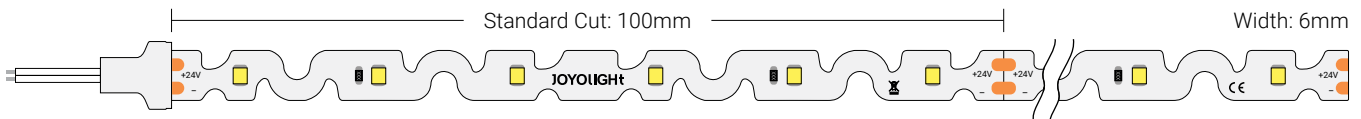

3000K 2.2 W/ft
186 lm/ft
85 lm/W



JLS8120SC

Single Cut LED tape

IP Level:



IP33

Colour:



2700K



3000K



4000K

Accessories:



LC2P-10mm
-IP33



LL2P-10mm
-IP33


SMD	2835
LED/m	120
Voltage	24V
Standard Cut	8.33mm
CRI	80+

Special Order:

- * IP55, IP65 (Nano), IP67, IP68 available
- * 3500K, 5000K, 6500K available
- * CRI 90+ available

Standard Cut: 8.33mm

Width: 10mm

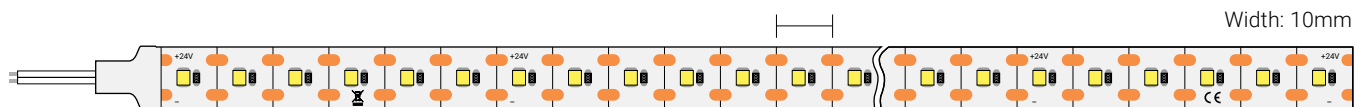

2700K 4.27 W/ft
406 lm/ft
95 lm/W

3000K 4.27 W/ft
384 lm/ft
90 lm/W

4000K 4.27 W/ft
427 lm/ft
100 lm/W



JLS2300

High Density LED tape

IP Level:



IP33

Colour:



3000K

SMD	2216
LED/m	300
Voltage	24V
Standard Cut	20mm
CRI	90+


Special Order:

* IP65 (Nano) available

* 2700K, 3500K, 4000K, 5000K, 6500K available



3000K 3 W/ft
230 lm/ft
77 lm/W

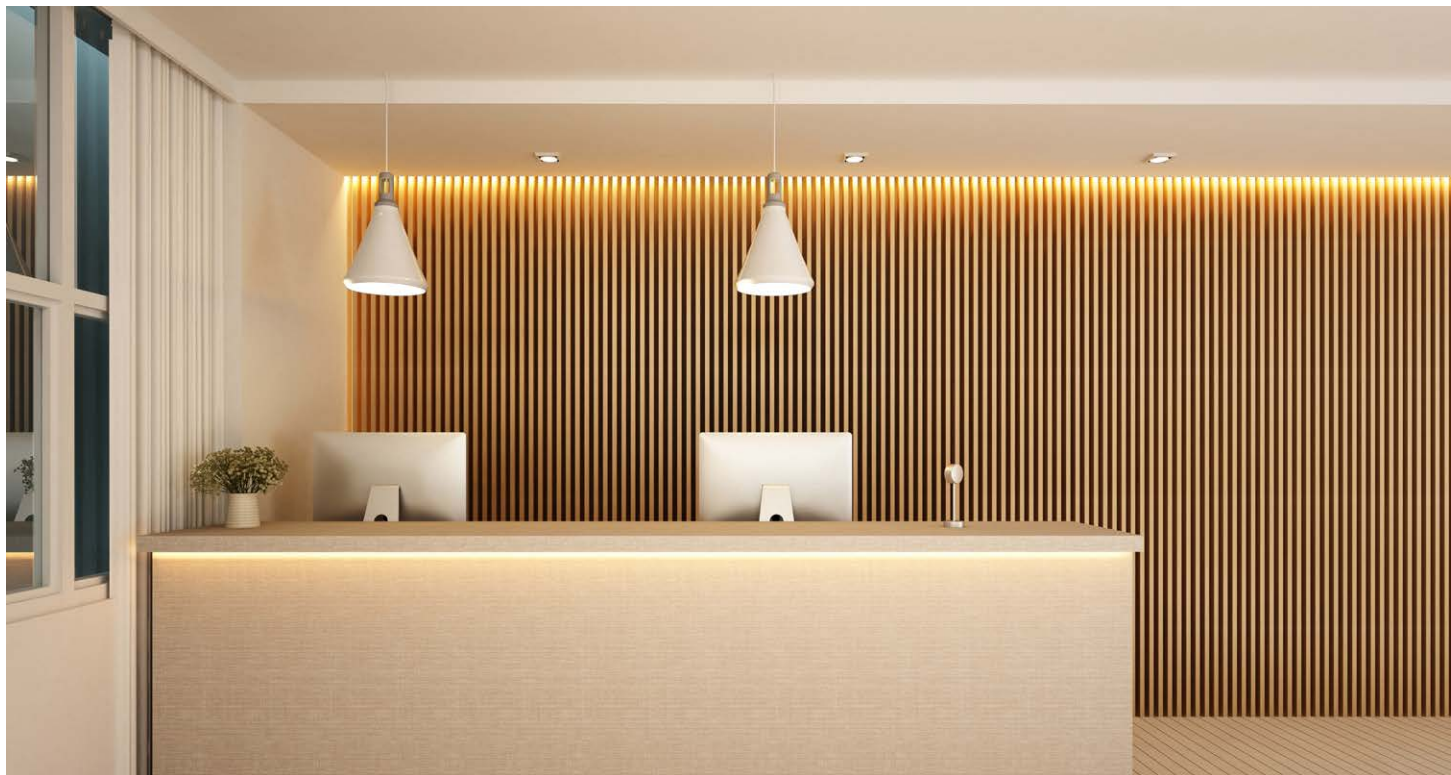

COB

Perfect diffused light with no need for a profile. UL certified and damp location rated.



COB003

IP Level:



IP55

Colour:



2700K



3000K



4000K

Accessories:



LC2P-10mmH
-IP33





LL2P-10mmH
-IP33

SMD	2835
LED/m	308
Voltage	24V
Standard Cut	45.4mm
CRI	90+

Special Order:

* 3500K, 5000K, 6500K available

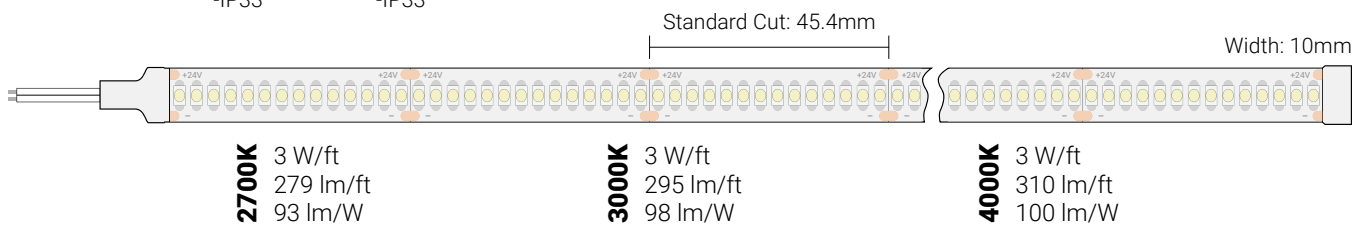

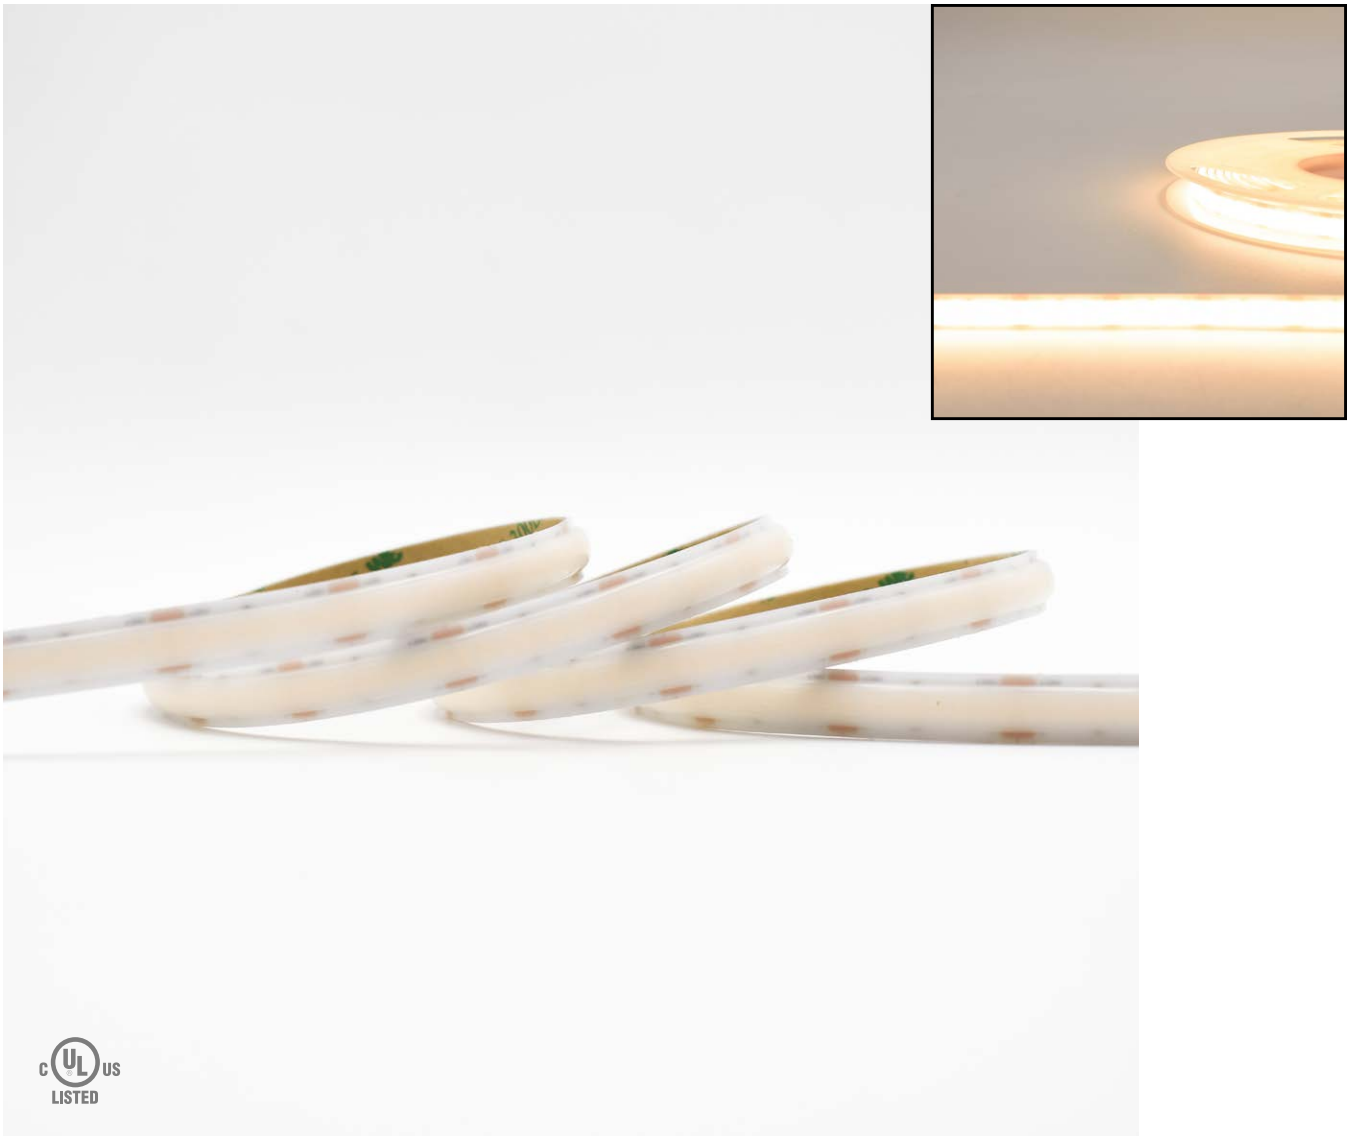

COBoo7

IP Level:



IP55

Colour:



2700K



3000K



4000K

Accessories:



LC2P-10mmH
-IP33





LL2P-10mmH
-IP33

SMD	2835
LED/m	304
Voltage	24V
Standard Cut	26.3mm
CRI	90+

Special Order:


* 3500K, 5000K, 6500K available

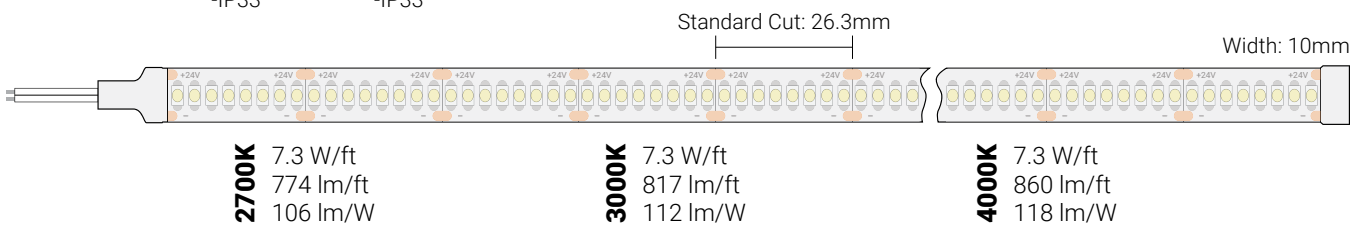

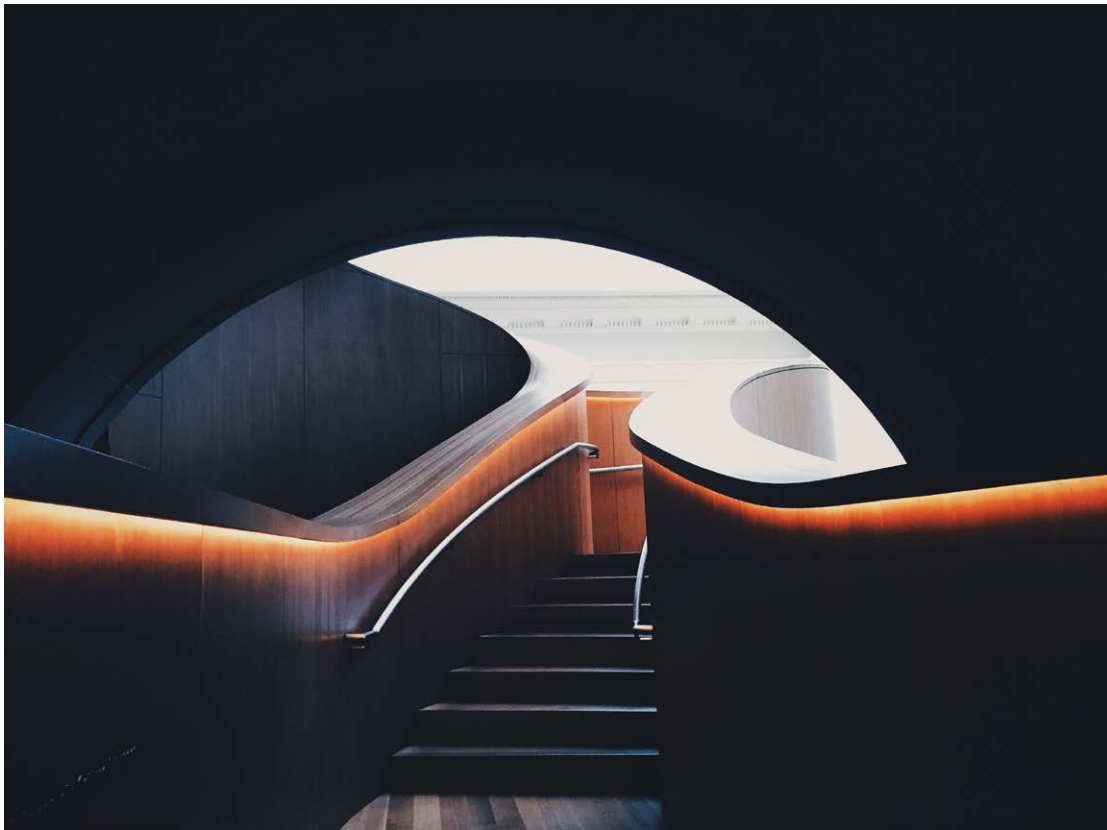

Neon

Flexible fixtures with perfectly smooth illumination. UL certified and damp or wet location rated with white or RGB/RGBW options.

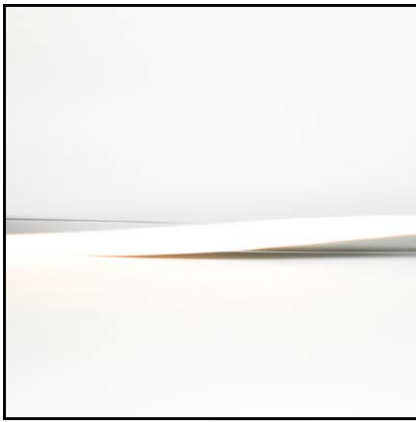

NE100

IP Level:



IP67

CCT:



2700K



3000K



3500K



4000K



5000K



6500K

Accessories:



NE100-BR



NE100-RC



NE100-MC



NE100-FC



NE100-WK

Top-Bend	Yes
Side-Bend	Yes
Voltage	24V
Standard Cut	Any length
CRI	80+
Application	Indoor / Outdoor



2700K 2.74 W/ft
123 lm/ft
45 lm/W

3000K 2.74 W/ft
130 lm/ft
48 lm/W

3500K 2.74 W/ft
130 lm/ft
48 lm/W

4000K 2.74 W/ft
137 lm/ft
50 lm/W

5000K 2.74 W/ft
137 lm/ft
50 lm/W

6500K 2.74 W/ft
137 lm/ft
50 lm/W



NE201

IP Level:



IP65

CCT:



2700K



3000K



3500K



4000K



5000K



6500K

Accessories:



NE201-BR



NE201-RC



NE201-MC




NE201-FC



NE201-WK

Top-Bend	Yes
Side-Bend	No
Voltage	24V
Standard Cut	50mm
CRI	80+
Application	Indoor / Outdoor



2700K 4.27 W/ft
244 lm/ft
57 lm/W

3000K 4.27 W/ft
256 lm/ft
60 lm/W

3500K 4.27 W/ft
264 lm/ft
62 lm/W

4000K 4.27 W/ft
264 lm/ft
62 lm/W

5000K 4.27 W/ft
268 lm/ft
63 lm/W

6500K 4.27 W/ft
268 lm/ft
63 lm/W



NE310

IP Level:



IP65

CCT:



2700K



3000K



3500K



4000K



5000K



6500K

Accessories:



NE310-BR



NE310-RC



NE310-MC



NE310-FC



NE310-WK

Top-Bend	No
Side-Bend	Yes
Voltage	24V
Standard Cut	50mm
CRI	80+
Application	Indoor / Outdoor



2700K 4.27 W/ft
183 lm/ft
43 lm/W

3000K 4.27 W/ft
192 lm/ft
45 lm/W

3500K 4.27 W/ft
198 lm/ft
46 lm/W

4000K 4.27 W/ft
198 lm/ft
46 lm/W

5000K 4.27 W/ft
201 lm/ft
47 lm/W

6500K 4.27 W/ft
201 lm/ft
47 lm/W



NE410

IP Level:



IP67

CCT:



Accessories:



Top-Bend	No
Side-Bend	Yes
Voltage	24V
Standard Cut	Any length
CRI	80+
Application	Indoor / Outdoor

Red	2.74 W/ft 11 lm/ft 4 lm/W	Orange	2.74 W/ft 28 lm/ft 10 lm/W	Yellow	2.74 W/ft 77 lm/ft 28 lm/W	Green	2.74 W/ft 12 lm/ft 4.4 lm/W	Cyan	2.74 W/ft 4.3 lm/ft 1.6 lm/W	Blue	2.74 W/ft 2 lm/ft 0.7 lm/W	Purple	2.74 W/ft 5.2 lm/ft 1.9 lm/W
2700K	2.74 W/ft 69 lm/ft 25 lm/W	3000K	2.74 W/ft 73 lm/ft 27 lm/W	3500K	2.74 W/ft 73 lm/ft 27 lm/W	4000K	2.74 W/ft 77 lm/ft 28 lm/W	5000K	2.74 W/ft 77 lm/ft 28 lm/W	6500K	2.74 W/ft 77 lm/ft 28 lm/W		



NE510

IP Level:



IP55

CCT:



2700K



3000K



3500K



4000K



5000K



6500K

Top-Bend	No
Side-Bend	Yes
Voltage	24V
Standard Cut	Any length
CRI	80+
Application	Indoor



2700K 2.74 W/ft
55 lm/ft
20 lm/W


3000K 2.74 W/ft
58 lm/ft
21 lm/W

3500K 2.74 W/ft
58 lm/ft
21 lm/W

4000K 2.74 W/ft
61 lm/ft
22 lm/W

5000K 2.74 W/ft
61 lm/ft
22 lm/W

6500K 2.74 W/ft
61 lm/ft
22 lm/W

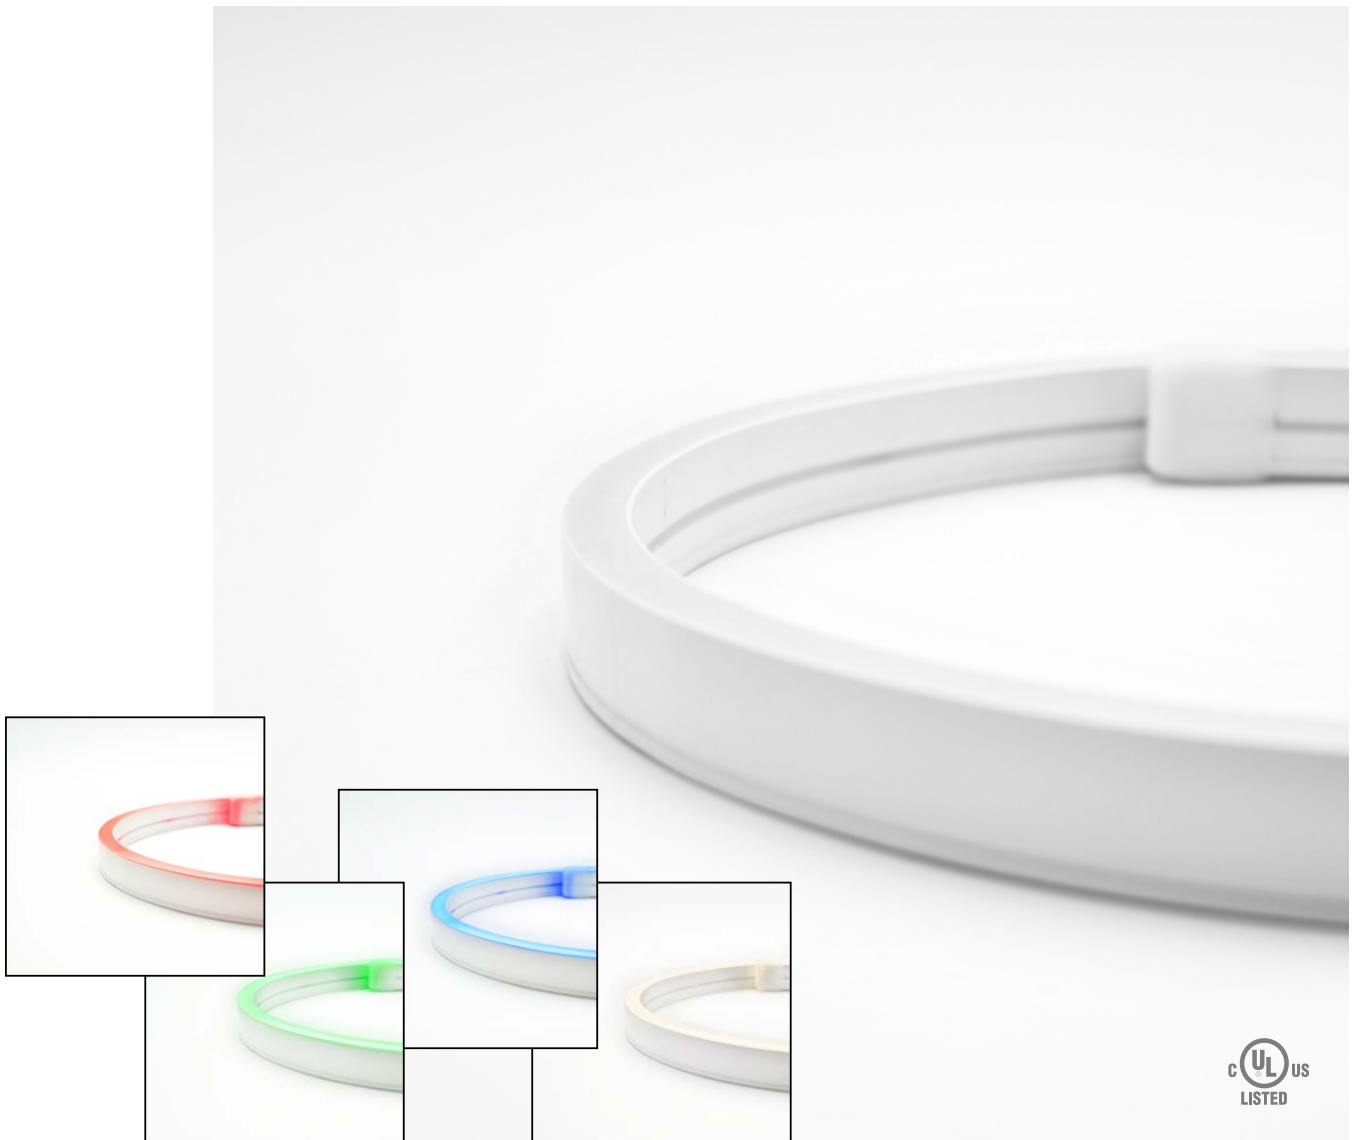

NE610

IP Level:



IP67

CCT:



Accessories:



NE610-BR



NE610-RC



NE610-MC




NE610-FC



NE610-WK

Top-Bend	No
Side-Bend	Yes
Voltage	24V
Standard Cut	71.4mm
CRI	80+
Application	Indoor / Outdoor



Red	5.49 W/ft 4 lm/ft 0.7 lm/W	Green	5.49 W/ft 11 lm/ft 2.0 lm/W	Blue	5.49 W/ft 2.1 lm/ft 0.4 lm/W	2700K	5.49 W/ft 11.6 lm/ft 2.1 lm/W	3000K	5.49 W/ft 12.2 lm/ft 2.2 lm/W	3500K	5.49 W/ft 12.5 lm/ft 2.3 lm/W	4000K	5.49 W/ft 12.5 lm/ft 2.3 lm/W	5000K	5.49 W/ft 12.8 lm/ft 2.3 lm/W	6500K	5.49 W/ft 12.8 lm/ft 2.3 lm/W
------------	----------------------------------	--------------	-----------------------------------	-------------	------------------------------------	--------------	-------------------------------------	--------------	-------------------------------------	--------------	-------------------------------------	--------------	-------------------------------------	--------------	-------------------------------------	--------------	-------------------------------------





LED TAPE - CCT

Regular order Special order

	LED Tape	CCT						
White	JLS360	2300K	2700K	3000K	3500K	4000K	5000K	6000K
	JLS3120	2300K	2700K	3000K	3500K	4000K	5000K	6000K
	JS8120	2300K	2700K	3000K	3500K	4000K	5000K	6000K
	JLS8160HE	2700K	3000K	3500K	4000K	5000K	6500K	
Toning	JLS560RGB	RGB						
	JLS560RGBW	RGB+2700K	RGB+3000K	RGB+4000K	RGB+6000K			
	JLS560RGB2W	RGB+1600K +2700K	RGB+1600K +3000K	RGB+1600K +3500K	RGB+1600K +4000K	RGB+1600K +5000K	RGB+1600K +6500K	
Tunable	JLS2240CCT	2700-6500K						
	JLS2224D2W	1800K-3000K						
Ultra	JLS8120UW	1600K	1800K	2000K	2200K	2400K		
	JLS8120UC	7500K	10000K					
	JLS870UL15	2700K	3000K	3500K	4000K	5000K	6500K	
	JLS870UL30	2700K	3000K	3500K	4000K	5000K	6500K	
	JLS2238US	2700K	3000K	3500K	4000K	5000K	6500K	
Special	JLS4140SV	2700K	3000K	3500K	4000K	5000K	6500K	
	JLS860BD	2700K	3000K	3500K	4000K	5000K	6500K	
	JLS8120SC	2700K	3000K	3500K	4000K	5000K	6500K	
	JLS2300	2700K	3000K	3500K	4000K	5000K	6500K	
COB	COB003	2700K	3000K	3500K	4000K	5000K	6500K	
	COB007	2700K	3000K	3500K	4000K	5000K	6500K	
Neon	NE100	2700K	3000K	3500K	4000K	5000K	6500K	
	NE201	2700K	3000K	3500K	4000K	5000K	6500K	
	NE310	2700K	3000K	3500K	4000K	5000K	6500K	
	NE410	2700K	3000K	3500K	4000K	5000K	6500K	
		Red	Orange	Yellow	Green	Cyan	Blue	Purple
	NE510	2700K	3000K	3500K	4000K	5000K	6500K	
	NE610	2700K+RGB	3000K+RGB	3500K+RGB	4000K+RGB	5000K+RGB	6500K+RGB	

LED TAPE - IP Level

Regular order
 Special order

	LED Tape	IP33	IP55	IP65	IP67	IP68
White	JLS360	IP33	IP55	IP65	IP67	
	JLS3120	IP33	IP55	IP65	IP67	
	JS8120	IP33	IP55	IP65	IP67	
	JLS8160HE	IP33	IP55			
Toning	JLS560RGB	IP33	IP55	IP65	IP67	
	JLS560RGBW	IP33	IP55	IP65	IP67	
	JLS560RGB2W	IP33		IP65		
Tunable	JLS2240CCT	IP33		IP65		
	JLS2224D2W	IP33		IP65		
Ultra	JLS8120UW	IP33	IP55	IP65	IP67	IP68
	JLS8120UC	IP33	IP55	IP65	IP67	IP68
	JLS870UL15	IP33	IP55		IP67	
	JLS870UL30	IP33	IP55		IP67	
	JLS2238US	IP33				
Special	JLS4140SV	IP33		IP65		
	JLS860BD	IP33				
	JLS8120SC	IP33	IP55	IP65	IP67	IP68
	JLS2300	IP33		IP65		
COB	COB003		IP55			
	COB007		IP55			
Neon	NE100				IP67	
	NE201			IP65		
	NE310			IP65		
	NE410				IP67	
	NE510		IP55			
	NE610				IP67	

LED TAPE - CRI*

	Ra≥80	Ra≥90
	80+	90+
	80+	90+
	80+	90+
		90+
	80+	
	80+	
		90+
		90+
	80+	90+
	80+	90+
	80+	90+
		90+
	80+	
	80+	
	80+	
	80+	
	80+	
	80+	

* Luminous flux for CRI 90 is 15% lower than for CRI 80. Luminous flux for full spectrum is 34% lower than for CRI 80. This estimation is for reference only, please refer to test reports for exact measurements.



ACCESSORIES

Specially designed accessories to support all your installation needs.

Tape Connector:



TC-LC01

Solderless 2-pin connector for 8mm IP33 LED strips to 20AWG stranded wire.



TC-LL01

Solderless 2-pin connector for two 8mm IP33 LED strips.



LC2P-8mm-IP33

Solderless 2-pin connector for 8mm IP33 LED strips to 20AWG stranded wire. (SMD LEDs \leq 120 LEDs/m)



LC2P-8mm-IP55

Solderless 2-pin connector for 8mm IP55 LED strips to 20AWG stranded wire. (SMD LEDs \leq 120 LEDs/m)



LL2P-8mm-IP33

Solderless 2-pin connector for two 8mm IP33 LED strips. (SMD LEDs \leq 120 LEDs/m)



LL2P-8mm-IP55

Solderless 2-pin connector for two 8mm IP55 LED strips. (SMD LEDs \leq 120 LEDs/m)



LC2P-10mm-IP33

Solderless 2-pin connector for 10mm IP33 LED strips to 20AWG stranded wire. (SMD LEDs \leq 120 LEDs/m)



LC2P-10mmH-IP33

Solderless 2-pin connector for 10mm IP33 LED strips to 20AWG stranded wire. (120 LEDs/m < SMD LEDs \leq 300 LEDs/m)



LL2P-10mm-IP33

Solderless 2-pin connector for two 10mm IP33 LED strips. (SMD LEDs \leq 120 LEDs/m)



LL2P-10mmH-IP33

Solderless 2-pin connector for two 10mm IP33 LED strips. (120 LEDs/m < SMD LEDs \leq 300 LEDs/m)



LC2P-12mmH-IP33

Solderless 2-pin connector for 12mm IP33 LED strips to 20AWG stranded wire. (120 LEDs/m < SMD LEDs \leq 300 LEDs/m)



LL2P-12mmH-IP33

Solderless 2-pin connector for two 12mm IP33 LED strips. (120 LEDs/m < SMD LEDs \leq 300 LEDs/m)



LC4P-10mm-IP33

Solderless 4-pin connector for 10mm IP33 LED strips to 20AWG stranded wire.



LL4P-10mm-IP33

Solderless 4-pin connector for two 10mm IP33 LED strips.



LC5P-12mm-IP33

Solderless 5-pin connector for 12mm IP33 LED strips to 20AWG stranded wire.



LL5P-12mm-IP33

Solderless 5-pin connector for two 12mm IP33 LED strips.

Tape Clip:



LED-MC

LED strip mounting clips.

Cable:



C2P-20

20AWG 2-conductor stranded wire



C4P-20

20AWG 4-conductor stranded wire



C5P-20

20AWG 5-conductor stranded wire

Cable Connector:



CC2P

Solderless non-stripped wire to wire connectors for 20AWG stranded wire. (2 pin)



CC3P

Solderless non-stripped wire to wire connectors for 20AWG stranded wire. (3 pin)



CC4P

Solderless non-stripped wire to wire connectors for 20AWG stranded wire. (4 pin)



CC6P

Solderless non-stripped wire to wire connectors for 20AWG stranded wire. (6 pin)

Tape Controller:



CON-RGB/RGBW

Controller for RGB or RGBW tape.



RE-RGBW

Signal Receiver for RGBW tape.



CON-RGB2WCCT

Controller for RGB2W CCT tunable tape.



RE-RGB2WCCT

Signal Receiver for RGBW CCT tunable tape.

Tape Profile:




LS1715

Installation: Recessed / Surface Mounted

*** Finish:** Silver / White / Black

Available tape: JLS360, JLS3120, JLS8120, JLS8160HE, JLS2240CCT, JLS2224D2W, JLS8120UW, JLS8120UC, JLS2238US, JLS8120SC, JLS2300, COB003, COB007

**Please contact us for customization options.*

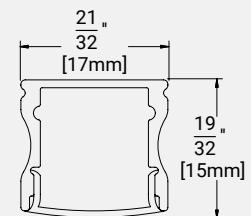



INTEGRATED

CLASSIC

High-efficiency professional lighting fixtures with integrated 0-10V dimmable drivers offer power and convenience in a ready-to-install package.

CREATIVE

The efficiency and power of our Classic Series with customizable length, shape, and color tailored to your project and needs.



#1



#1

LS9086

→ P66

- Integrated 0-10V dimmable driver
- Uniform luminescence, no dark areas
- Includes all installation accessories

#2

LS5580D

→ P62

- Direct/Indirect Lighting
- Integrated 0-10V dimmable driver
- Uniform luminescence, no dark areas
- Includes all installation accessories



#2



#3

#3

LS7380

→ P64

- Integrated 0-10V dimmable driver
- Uniform luminescence, no dark areas
- Includes all installation accessories



#4

#4

LS5570


→ P60

- Integrated 0-10V dimmable driver
- Uniform luminescence, no dark areas
- Includes all installation accessories



INTEGRATED POWER SUPPLY

For greater visual appeal, better user experience, and a more flexible design, we have integrated the power supply directly in to the profile. Our built in Class P Certified power supply supports 0-10V dimming and is UL Certified.

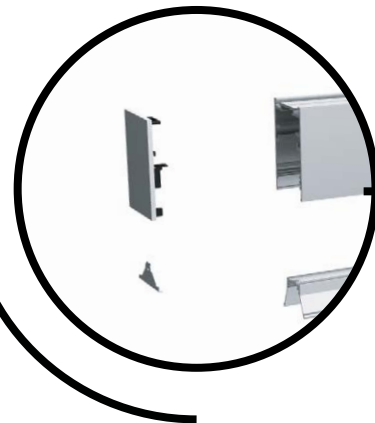


METAL END CAPS

To add to the high quality fit and finish of our PLS series, each fixture comes standard with metal end caps that are more durable and more visually appealing.



CUSTOMIZATION

Our Creative series within the PLS line offers complete customization options. Our team of professionals will guide you through the process from design and product specification to delivery and installation of the final product.

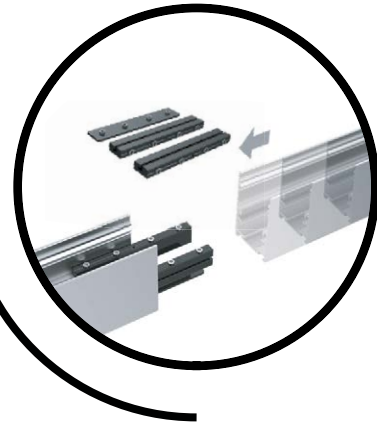


EASY INSTALLATION

The PLS series offers a full suite of professional installation accessories to simplify the installation process and make customization as easy as 1, 2, 3.

Product Service




CLASSIC (Standard)




Size: 4ft



8ft



4ft & 8ft connectable



Color: BL: Black



WH: White



Corner-Cutting: Not Applicable




CREATIVE (Customized shape)



Size: Any size

Any Shape

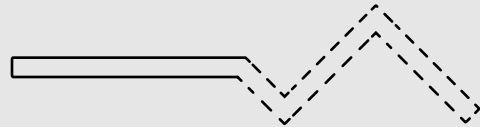

Color: BL: Black



WH: White



SV: Silver



SC: Special Color



Corner-Cutting: Applicable




Customized Service Process






LS5570 (Classic/Creative)

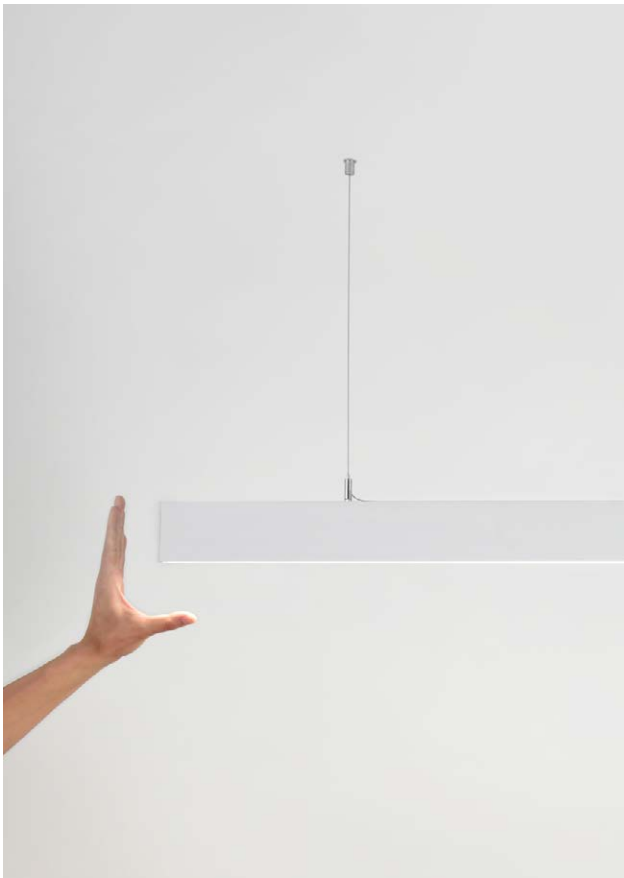

PERFORMANCE SUMMARY		
Watt / ft	Lumen / ft	Lumen / Watt
7.80	775	100

Tested using 4000K light.

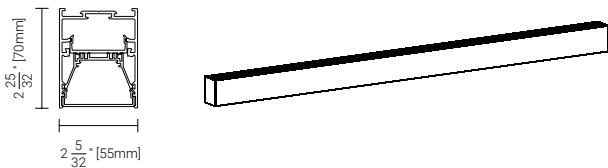

Installation:



CCT:



Features

1. Aluminum 6063-T5 provides good heat dissipation and a long lifespan
2. Supports 0-10V dimming
3. High efficiency
4. Long life span of more than 50,000 hours
5. LM-80 Certified LEDs
6. UL Class P Certified power supply.

General Parameters

CRI	85 / 90
IP Grade	IP 33
Energy Efficiency	A+
Operating Temperature	-20°C ~ +45°C
Storage Temperature	-40°C ~ +60°C
Warranty	5 years

Photoelectric Parameters

Working Voltage [V]	AC100-277V / AC / 50~60Hz
Beam Angle [°]	96
Dimming Range	1~100%
PF	>0.9
Max. Length Input Current	6A
Max. Continuous Length	80ft




LS5580D (Classic/Creative)



PERFORMANCE SUMMARY		
Watt / ft	Lumen / ft	Lumen / Watt
4.3+6.7 = 11 Up+Down = Total	444+669 = 1113 Up+Down = Total	101

Tested using 4000K light.

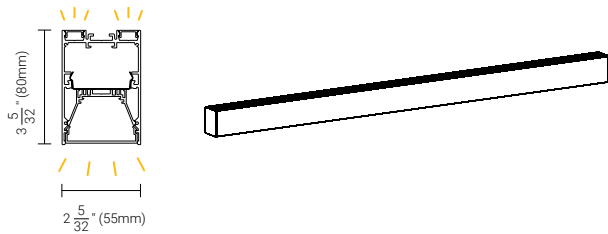

Installation:



CCT:

- 3000K
- 3500K
- 4000K

Features

1. Aluminum 6063-T5 provides good heat dissipation and a long lifespan
2. Supports 0-10V dimming
3. High efficiency
4. Long life span of more than 50,000 hours
5. LM-80 Certified LEDs
6. UL Class P Certified power supply.

General Parameters

CRI	85 / 90
IP Grade	IP 33
Energy Efficiency	A+
Operating Temperature	-20°C ~ +45°C
Storage Temperature	-40°C ~ +60°C
Warranty	5 years

Photoelectric Parameters

Working Voltage [V]	AC100-277V / AC / 50~60Hz
Beam Angle [°]	96
Dimming Range	1~100%
PF	>0.9
Max Length Input Current	6A
Max. Continuous Length	56ft




LS7380 (Classic/Creative)



PERFORMANCE SUMMARY		
Watt / ft	Lumen / ft	Lumen / Watt
8.5	866	102

Tested using 4000K light.

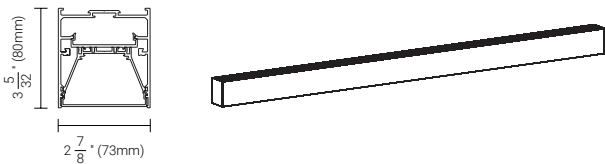

Installation:



CCT:



Features

1. Aluminum 6063-T5 provides good heat dissipation and a long lifespan
2. Supports 0-10V dimming
3. High efficiency
4. Long life span of more than 50,000 hours
5. LM-80 Certified LEDs
6. UL Class P Certified power supply.

General Parameters

CRI	85 / 90
IP Grade	IP 33
Energy Efficiency	A+
Operating Temperature	-20°C ~ +45°C
Storage Temperature	-40°C ~ +60°C
Warranty	5 years

Photoelectric Parameters

Working Voltage [V]	AC100-277V / AC / 50~60Hz
Beam Angle [°]	98
Dimming Range	1~100%
PF	>0.9
Max Length Input Current	6A
Max. Continuous Length	72ft




LS9086 (Classic/Creative)



PERFORMANCE SUMMARY		
Watt / ft	Lumen / ft	Lumen / Watt
11.3	1250	111

Tested using 4000K light.

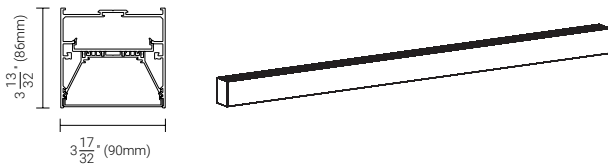

Installation:



CCT:



Features

1. Aluminum 6063-T5 provides good heat dissipation and a long lifespan
2. Supports 0-10V dimming
3. High efficiency
4. Long life span of more than 50,000 hours
5. LM-80 Certified LEDs
6. UL Class P Certified power supply.


General Parameters

CRI	85 / 90
IP Grade	IP 33
Energy Efficiency	A+
Operating Temperature	-20°C ~ +45°C
Storage Temperature	-40°C ~ +60°C
Warranty	5 years

Photoelectric Parameters

Working Voltage [V]	AC100-277V / AC / 50~60Hz
Beam Angle [°]	98
Dimming Range	1~100%
PF	>0.9
Max. Length Input Current	6A
Max. Continuous Length	56ft



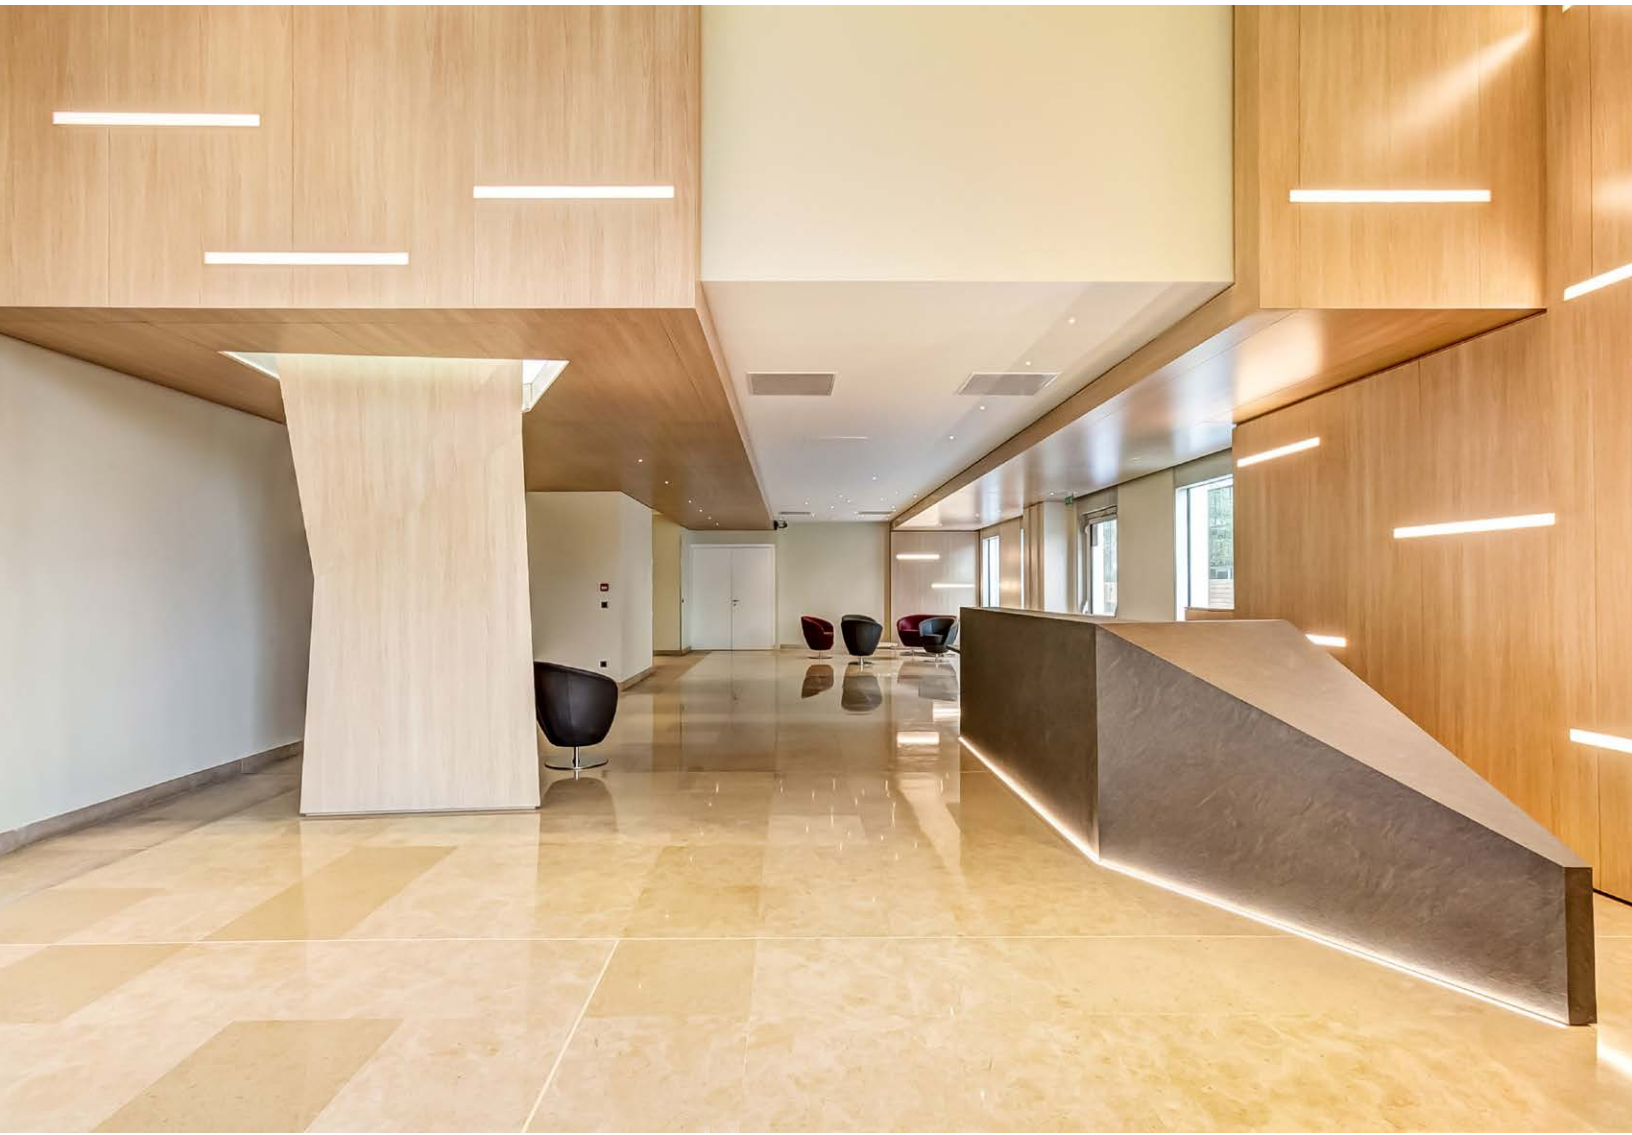



FIXTURE

GEOMETRY

Powerful lighting, flexible installation, and a fully-customizable product line provides our clients with lighting solutions for any project, large or small, residential or commercial.



#5

#5

LS5050

[→ P75](#)

- Suspension installation accessories available;
- Uniform luminescence, no dark areas.



#6

#6

LT40, LT60, LT120

[→ P79](#)

- New design concept
- Unique shape
- Reliable stainless-steel mounting kit.



#7



#8

#7

LS7477

→ P75

- A wide range of installation accessories available;
- Uniform luminescence, no dark areas.

#8

LE4932

→ P77


- Recessed installation accessories available;
- Uniform luminescence, no dark areas.



LS3535

Working Voltage	Power	Delivery Lumen
24 V	7.6 W/ft	541 lm/ft

*Tested Samples: 4ft Aluminum with JLS8280-24mm-4000K LED Strip.



Installation: Suspension Surface Mounted

***Finish:** Silver White Black


***CCT:** 2700K 3000K 4000K

***Length** 4ft / 8ft

LS5050

Working Voltage	Power	Delivery Lumen
24 V	9.1 W/ft	802 lm/ft

*Tested Samples: 4ft Aluminum with JLS8280-30mm-4000K LED Strip.



Installation: Suspension Recessed

***Finish:** Silver White Black


***CCT:** 2700K 3000K 4000K

***Length** 4ft / 8ft

LS7477

Working Voltage	Power	Delivery Lumen
24 V	11 W/ft	1009 lm/ft

*Tested Samples: 4ft Aluminum with JLS8420-40mm-4000K LED Strip.



Installation: Suspension Recessed

***Finish:** Silver White Black

***CCT:** 2700K 3000K 4000K

***Length** 4ft / 8ft


*Please contact us for customization options.



LE4932

Working Voltage	Power	Delivery Lumen
24 V	7.6 W/ft	565 lm/ft

*Tested Samples: 4ft Aluminum with JLS8280-24mm-4000K LED Strip.

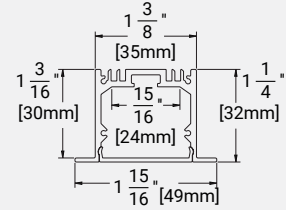

Installation: Recessed

*Finish: White Black


*CCT: 2700K 3000K 4000K

*Length 4ft / 8ft

LE6332

Working Voltage	Power	Delivery Lumen
24 V	9.1 W/ft	820 lm/ft

*Tested Samples: 4ft Aluminum with JLS8280-30mm-4000K LED Strip.

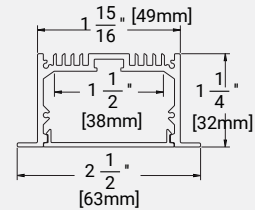

Installation: Recessed

*Finish: White Black


*CCT: 2700K 3000K 4000K

*Length 4ft / 8ft

LE8832

Working Voltage	Power	Delivery Lumen
24 V	11 W/ft	1081 lm/ft

*Tested Samples: 4ft Aluminum with JLS8420-40mm-4000K LED Strip.

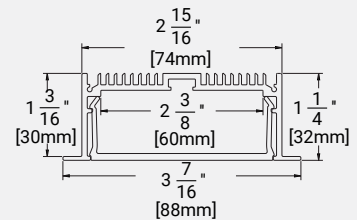

Installation: Recessed

*Finish: White Black

*CCT: 2700K 3000K 4000K

*Length 4ft / 8ft


*Please contact us for customization options.




LT40

Working Voltage	Power	Delivery Lumen
24 V	6.16 W/ft	739 lm/ft

*Tested Samples: 4ft Aluminum with JLS8196-15mm-4000K LED Strip.

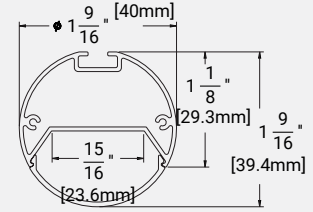

Installation:  Suspension

*Finish: Silver White Black


*CCT: 2700K 3000K 4000K


*Length 4ft / 8ft

LT60

Working Voltage	Power	Delivery Lumen
24 V	7.6 W/ft	909 lm/ft

*Tested Samples: 4ft Aluminum with JLS8280-24mm-4000K LED Strip.

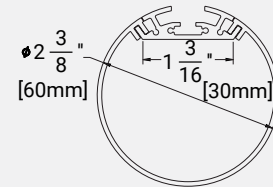

Installation:  Suspension

*Finish: Silver White Black


*CCT: 2700K 3000K 4000K


*Length 4ft / 8ft

LT120

Working Voltage	Power	Delivery Lumen
24 V	11 W/ft	1230 lm/ft

*Tested Samples: 4ft Aluminum with JLS8420-40mm-4000K LED Strip.

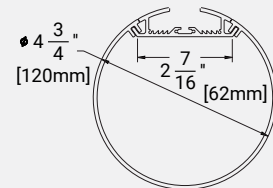

Installation:  Suspension


*Finish: Silver White Black


*CCT: 2700K 3000K 4000K

*Length 4ft / 8ft

*Please contact us for customization options.



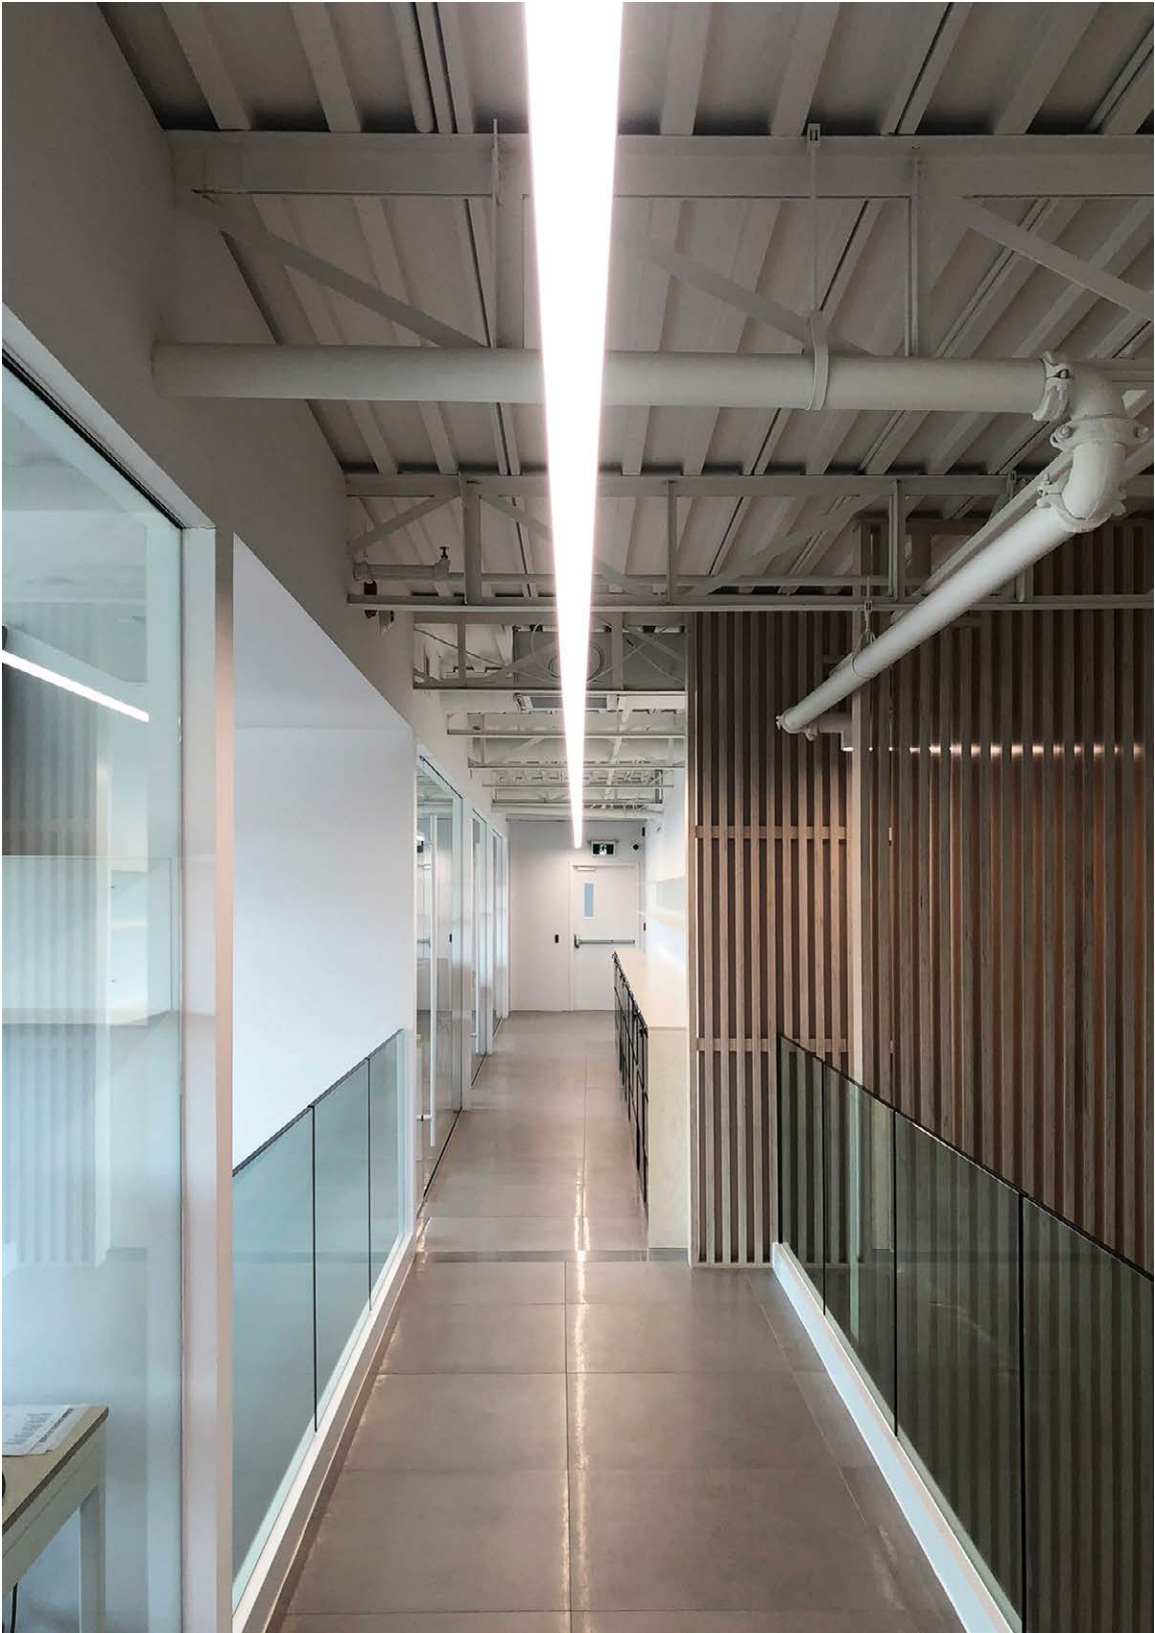

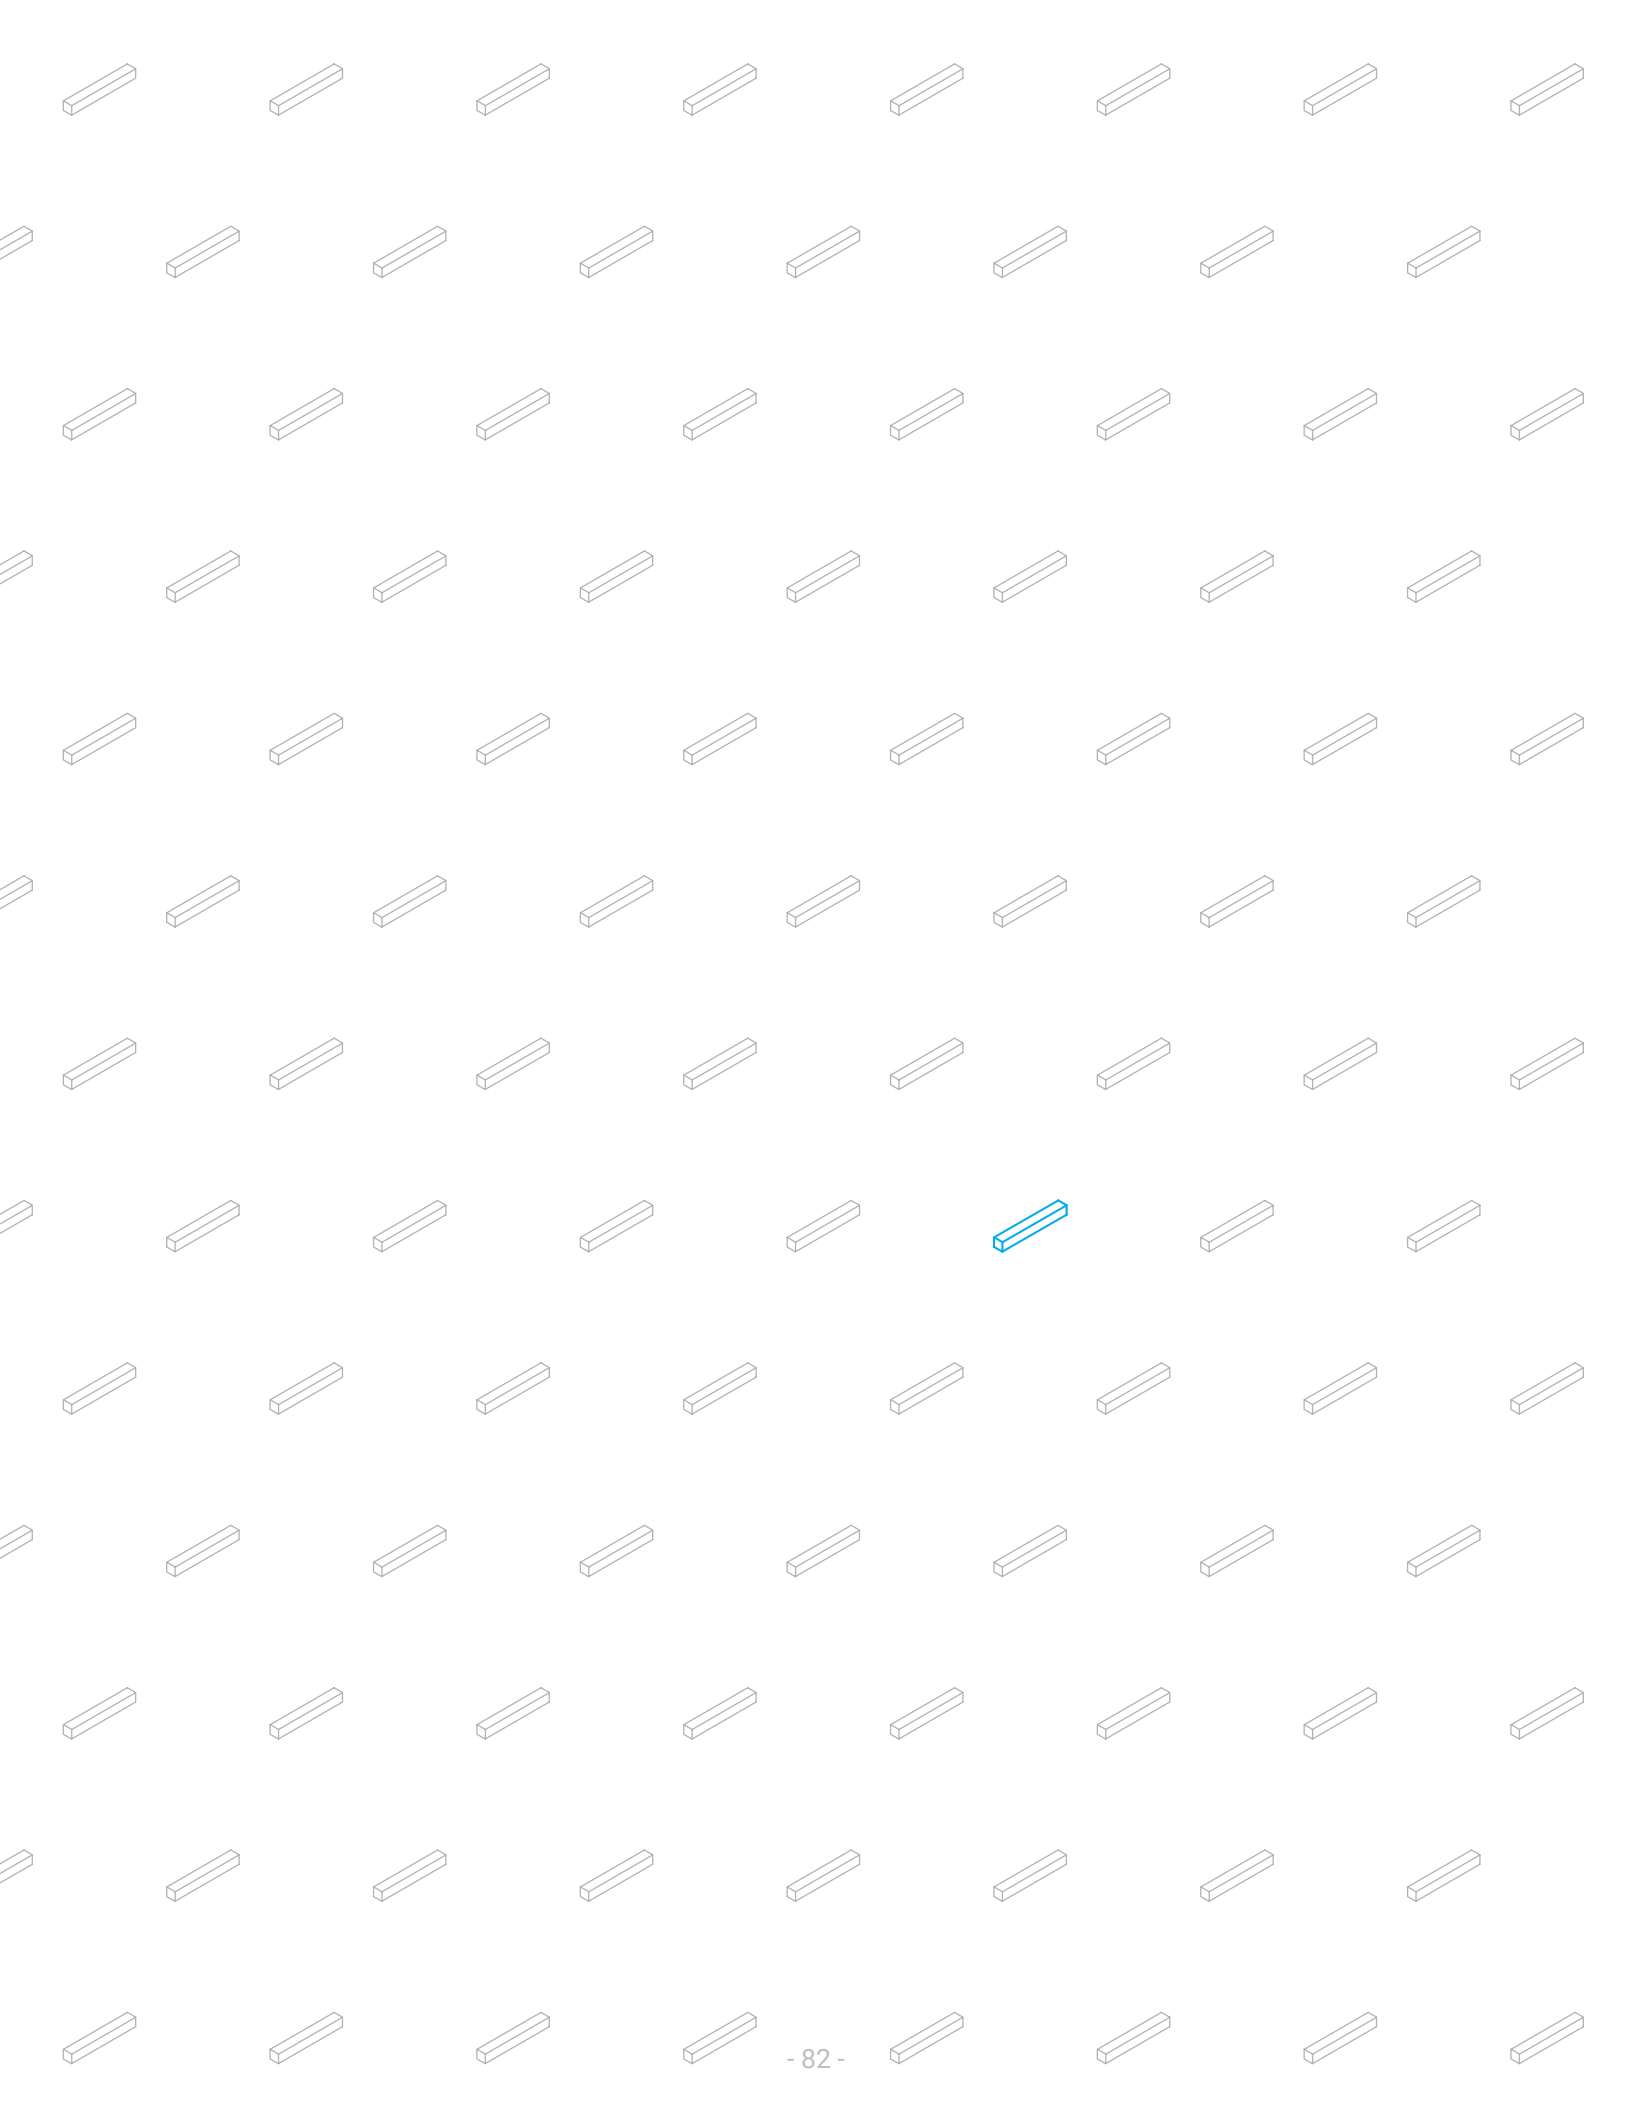

SLIM

Ideal for interior decorative lighting and accent lighting, our Slim family of fixtures will add elegance and ambiance to your space, creating the perfect atmosphere.

#9

LS1613

→ P87

- Slim Design
- A wide range of installation accessories available;
- Uniform luminescence, no dark areas.

#10

LE2513

→ P87

- A wide range of installation accessories available;
- Long lifespan;
- Uniform luminescence, no dark areas.

#9 #10




#11

LS1911K


→ P89

- Two types of lens shapes to choose from;
- A wide range of installation accessories available;
- Uniform luminescence, no dark areas.

#11

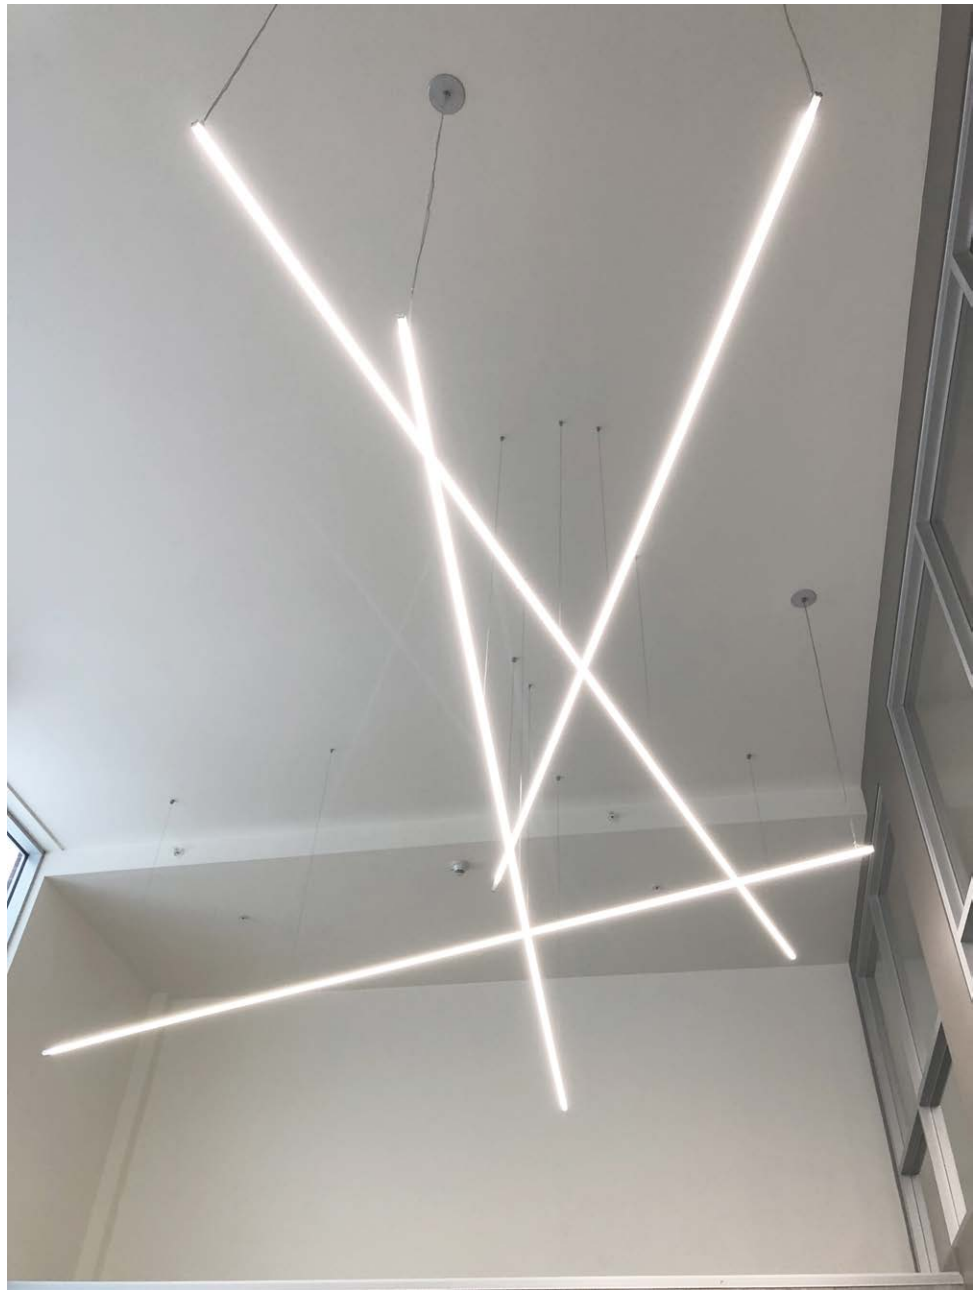


SLIM

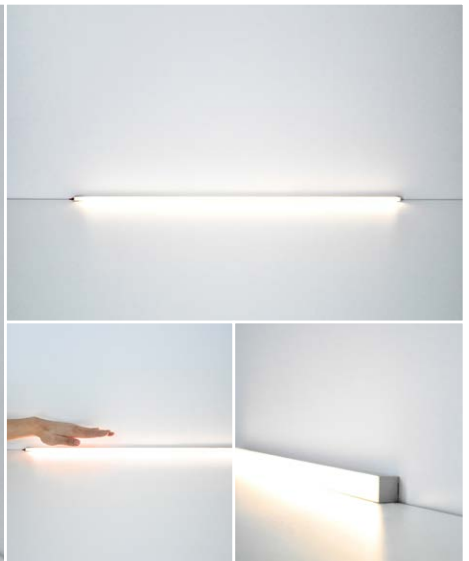

LS0709

Working Voltage	Power	Delivery Lumen
24 V	2.2 W/ft	107 lm/ft

*Tested Samples: 4ft Aluminum with JLS2238US-4mm-4000K LED Strip.



Installation: Surface Mounted Recessed

***Finish:** Silver White Black


***CCT:** 2700K 3000K 4000K

***Length** 4ft / 8ft

LS1613

Working Voltage	Power	Delivery Lumen
24 V	4.4 W/ft	270 lm/ft

*Tested Samples: 4ft Aluminum with JLS8120-4000K LED Strip.



Installation: Surface Mounted Recessed

***Finish:** Silver White Black


***CCT:** 2700K 3000K 4000K

***Length** 4ft / 8ft

LE2513

Working Voltage	Power	Delivery Lumen
24 V	4.4 W/ft	258 lm/ft

*Tested Samples: 4ft Aluminum with JLS8120-4000K LED Strip.

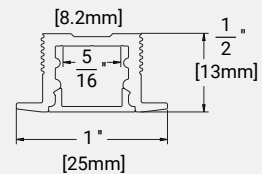

Installation: Recessed

***Finish:** Silver White Black

***CCT:** 2700K 3000K 4000K

***Length** 4ft / 8ft


*Please contact us for customization options.





LS1911C

Working Voltage	Power	Delivery Lumen
24 V	6.1 W/ft	706 lm/ft

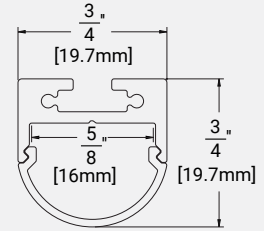**Tested Samples: 4ft Aluminum with JLS8196-15mm-4000K LED Strip.*



Installation:  Suspension  Surface Mounted

***Finish:** Silver White Black


***CCT:** 2700K 3000K 4000K



***Length** 4ft / 8ft

LS1911K

Working Voltage	Power	Delivery Lumen
24 V	6.1 W/ft	657 lm/ft

**Tested Samples: 4ft Aluminum with JLS8196-15mm-4000K LED Strip.*





Installation:  Suspension  Surface Mounted

***Finish:** Silver White Black

***CCT:** 2700K 3000K 4000K


***Length** 4ft / 8ft

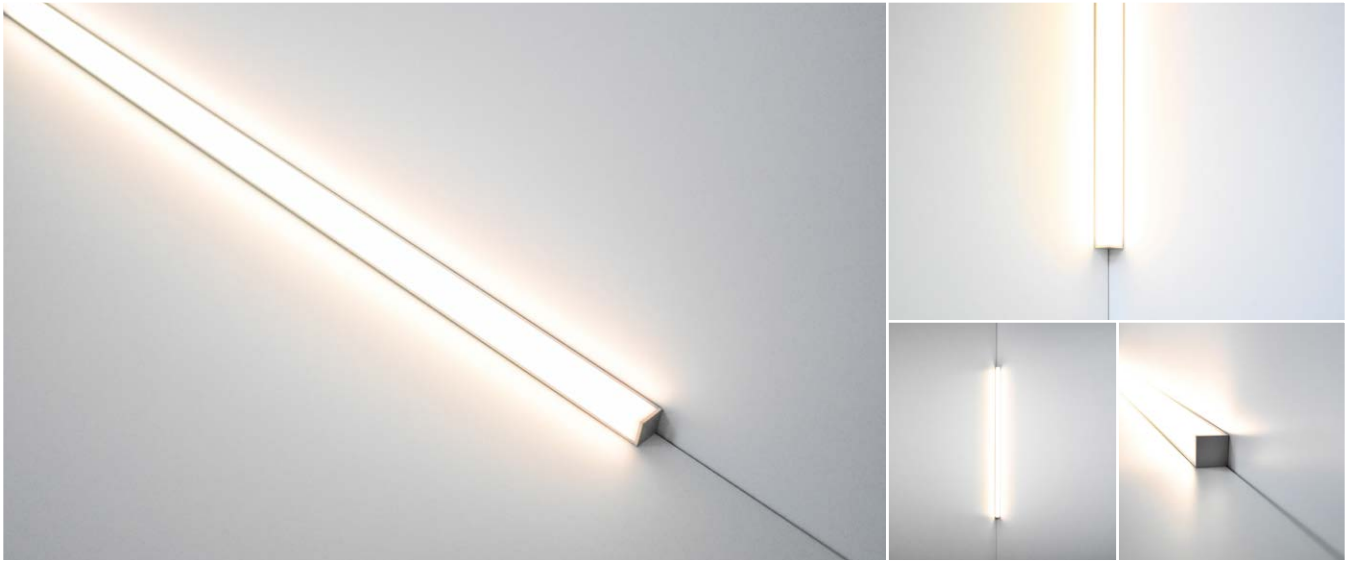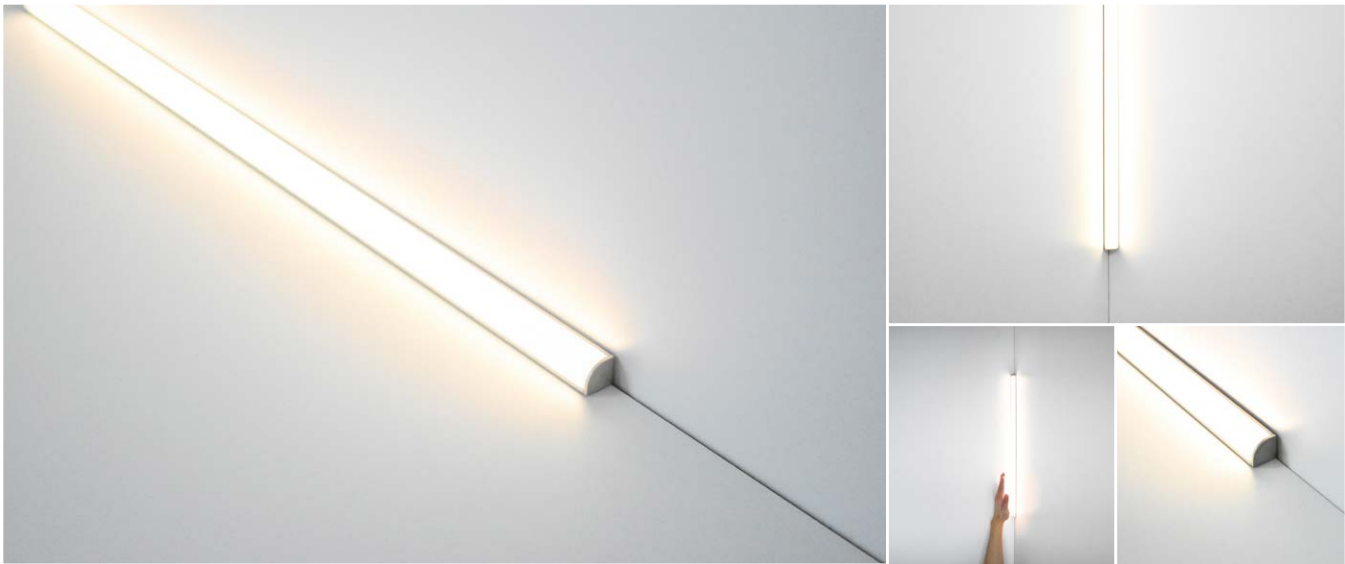


LG1616C

Working Voltage	Power	Delivery Lumen
24 V	4.4 W/ft	323 lm/ft

**Tested Samples: 4ft Aluminum with JLS8120-4000K LED Strip.*



Installation:  Surface Mounted

***Finish:** Silver White Black


***CCT:** 2700K 3000K 4000K


***Length** 4ft / 8ft

LG1616K

Working Voltage	Power	Delivery Lumen
24 V	4.4 W/ft	333 lm/ft

**Tested Samples: 4ft Aluminum with JLS8120-4000K LED Strip.*





Installation:  Surface Mounted

***Finish:** Silver White Black

***CCT:** 2700K 3000K 4000K

***Length** 4ft / 8ft


**Please contact us for customization options.*

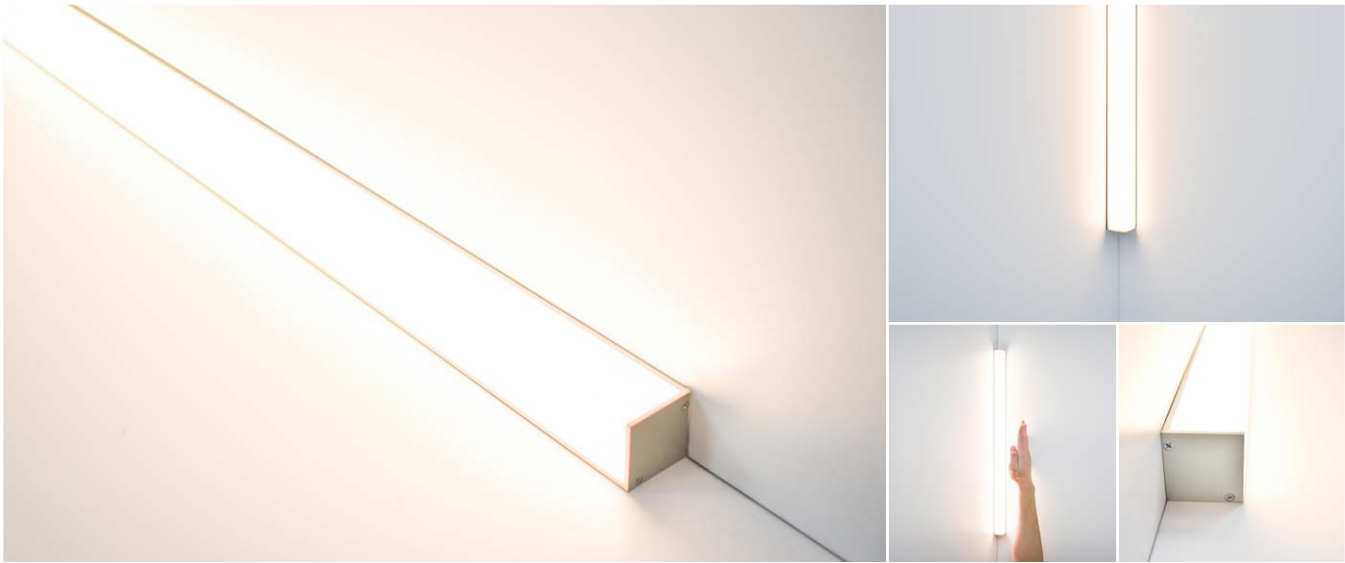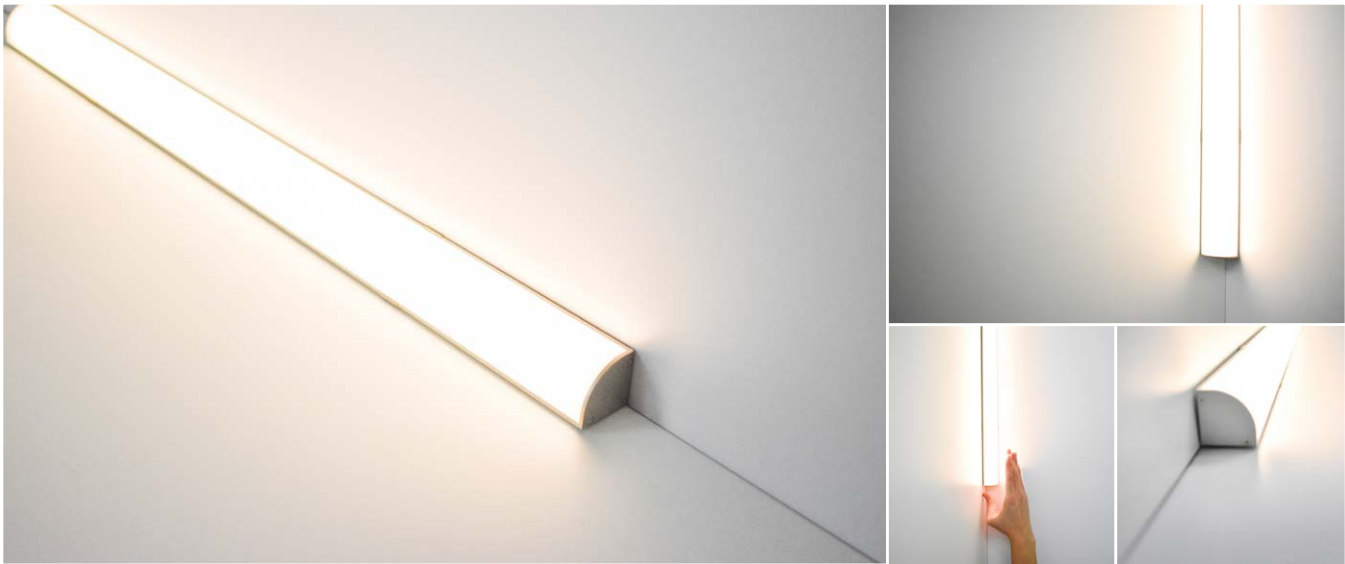


LG3030C

Working Voltage	Power	Delivery Lumen
24 V	6.1 W/ft	669 lm/ft

**Tested Samples: 4ft Aluminum with JLS8196-15mm-4000K LED Strip.*



Installation:  Surface Mounted

***Finish:** Silver White Black


***CCT:** 2700K 3000K 4000K


***Length** 4ft / 8ft

LG3030K

Working Voltage	Power	Delivery Lumen
24 V	6.1 W/ft	600 lm/ft

**Tested Samples: 4ft Aluminum with JLS8196-15mm-4000K LED Strip.*



Installation:  Surface Mounted

***Finish:** Silver White Black


***CCT:** 2700K 3000K 4000K

***Length** 4ft / 8ft

**Please contact us for customization options.*





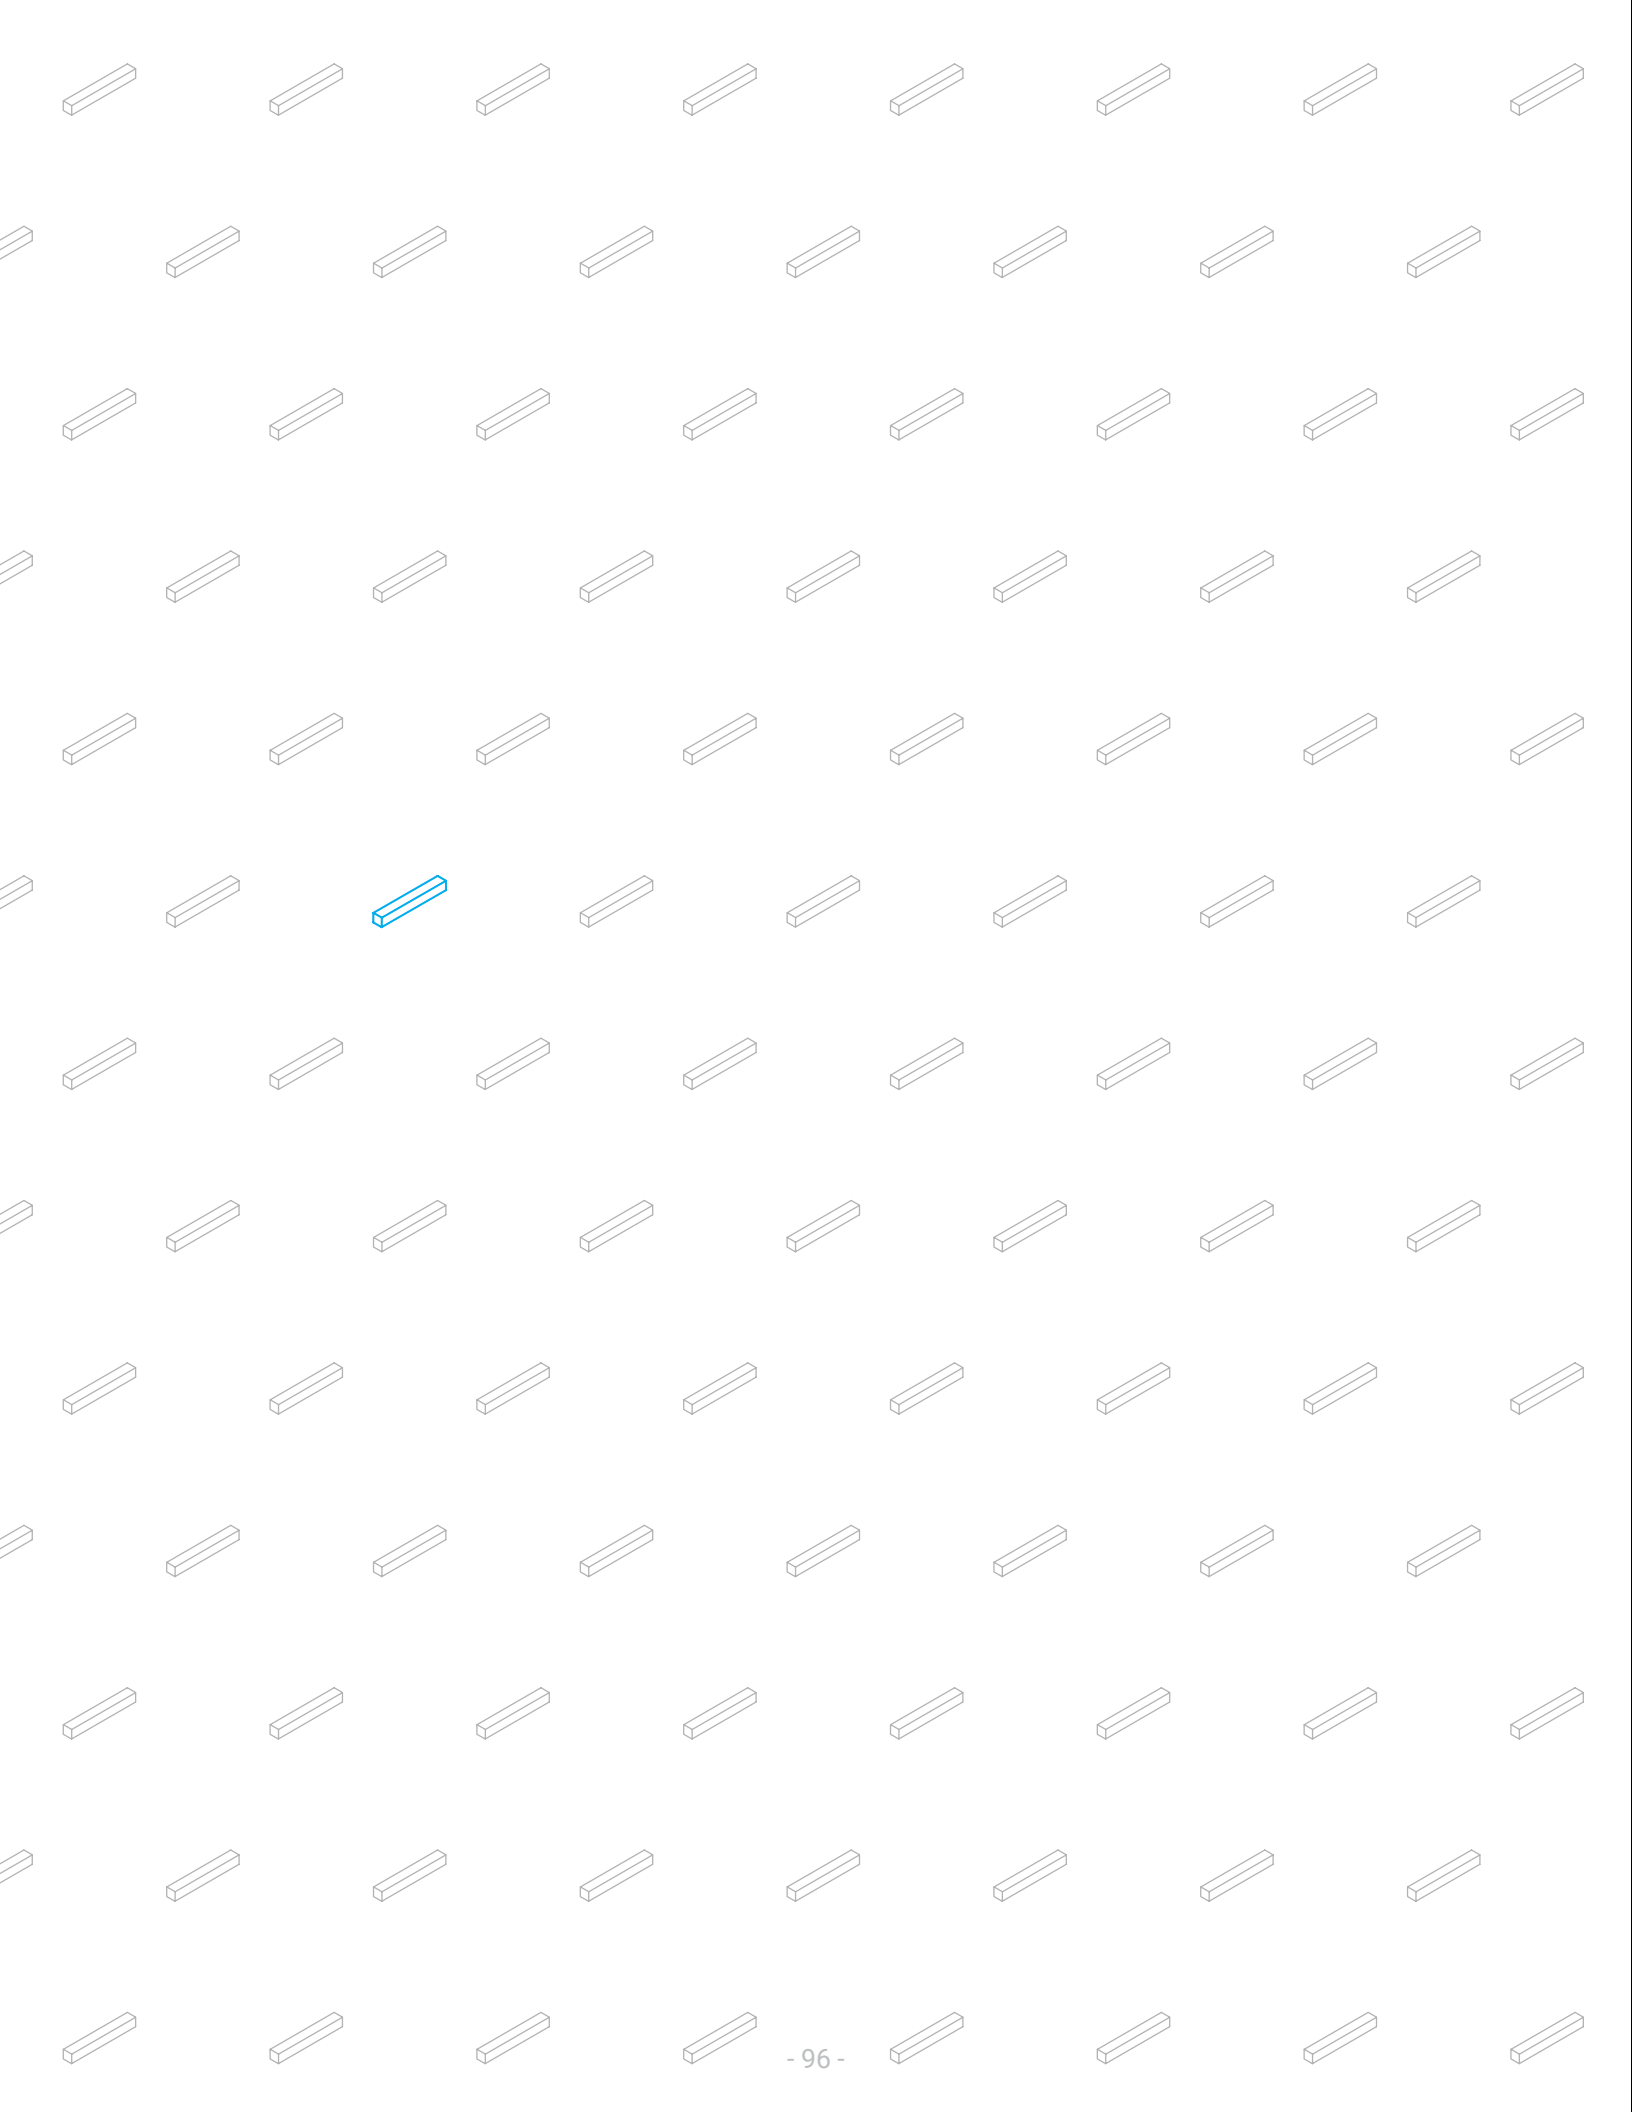

INSTANT

World's best modular linear lighting product. The LS1112 model line offers endless combinations of instantly customizable linear lighting, perfect for accent lighting applications.

LS1112



So Much Light...

LS1112 provides smooth, consistent illumination in an instantly-customizable package. Our unique design allows up to 5 meters [16.4ft] continuous run length in seamless connection.

So Little to Do...

LS1112 is designed for quick and easy assembly and installation. Using either screw-down brackets or our easy to use magnetic installation, you can safely install your custom LS1112 yourself in surprisingly little time.

So Much Creativity...

Become your own designer! With the modular design of the LS1112, the combinations are endless. Use the plug-in connectors and any combination of pieces to create your own unique configuration.






INSTANT

LS1112

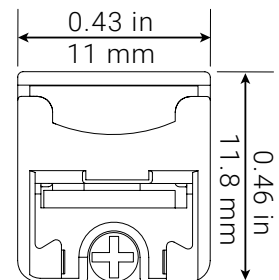

Working Voltage	Luminous Efficiency	Power	CRI	Beam Angle
DC 24 V	70 lm/W	4 W/ft	≥90	120°



Installation:  Recessed  Surface Mounted

***Finish:**  Silver

***CCT:**  2700K  3000K  4000K

***Type:** 04 / 08 / 12 / 23 / 47 / 59 / X-shape / T-shape / 4 types of corner fixtures

**LS1112-BR**

Plastic brackets and metal screws for installing profile.

**LS1112-MS**

Magnetic metal sheet with 3M tape for installing profile.

**LS1112-EC**

Plastic end caps for profiles.

**LS1112-JP1 & LS1112-JP2**

0.15/1.5 meter power cable with male & female pin connectors.

**LS1112-PD1**

0.15 meter power cable with DC 5.5 female connectors & female pin connector.

**LS1112-PD2**


1.5 meter power cable with DC 5.5 female connectors & female pin connector.

**LS1112-PC**

1.5 meter power lead wire with DC 5.5 female connector & female pin connector.

**LS1112-BR-45**

45 degree angled bracket

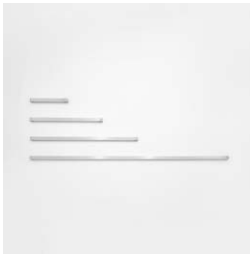**LS1112-04/08/12/23/47/59**

Linear fixture
CCT: 2700K / 3000K / 4000K
Length: 04/08/12/23/47/59 inch

**LS1112-CL**

Corner fixture (clockwise),
3000K, 90.5x83x11.8mm

**LS1112-CR**

Corner fixture (counter clockwise),
3000K, 90.5x83x11.8mm

**LS1112-CT-3000K**

Link flow linear light, T bar,
CCT=3000K, 3.55W, 260lm

**LS1112-CX-3000K**

Link flow linear light, cross,
CCT=3000K, 4.44W, 310lm

**LS1112-CI-3000K**

Link flow linear light, corner-in,
CCT=3000K, 2.22W, 155lm

**LS1112-CO-3000K**

Link flow linear light, corner-out,
CCT=3000K, 2.22W, 155lm

**LS1112-DM**

In-line touch dimmer (Max.
72W/24V in a row)

**LS1112-JLD-24-24**

1.5m plug and DC connector
24W Driver.

**LS1112-JLD-36-24**

1.5m plug and DC connector
36W Driver.

**LS1112-JLD-60-24**

1.5m plug and DC connector
60W Driver.





Part No.	Size	Power $\pm 10\%$	Luminous Flux $\pm 10\%$
LS1112-04	04 - 4.72 in	1.25 W	88 lm
LS1112-08	08 - 8.66 in	2.5 W	176 lm
LS1112-12	12 - 12.6 in	3.7 W	259 lm
LS1112-23	23 - 23.6 in	8 W	560 lm
LS1112-47	47 - 47.2 in	16 W	1120 lm
LS1112-59	59 - 59.0 in	20 W	1400 lm





Installation instruction



1. Flush or surface mounting by magnet, for metal surface.

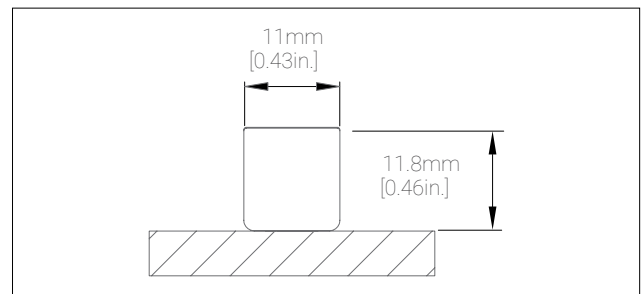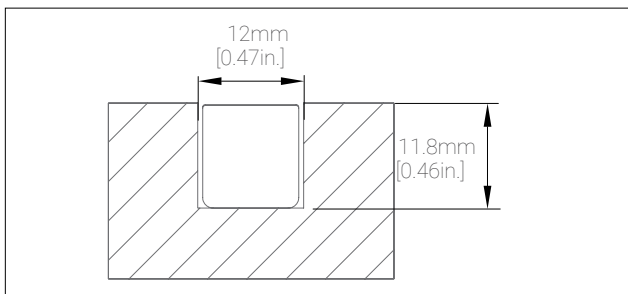


2. Flush or surface mounting by magnet + metal sheet, for non-metal surface.

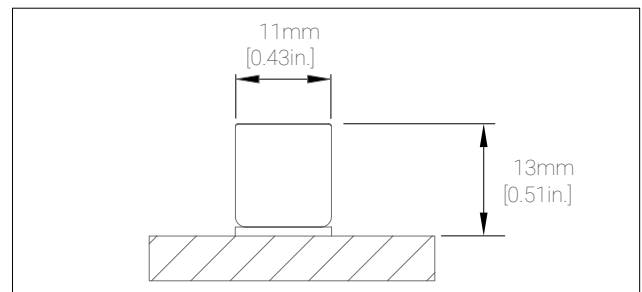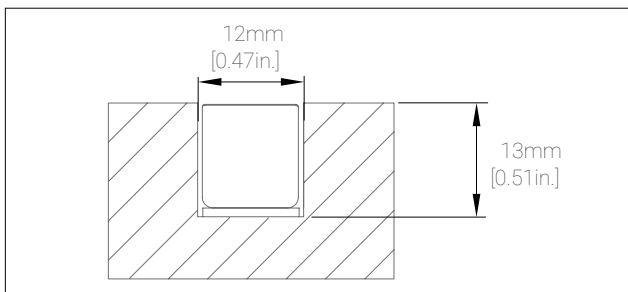

3. Flush or surface mounting by bracket, for non-metal surface.

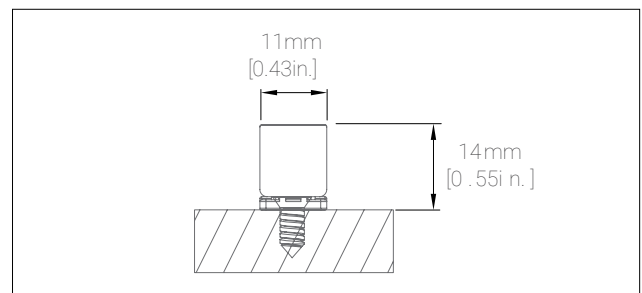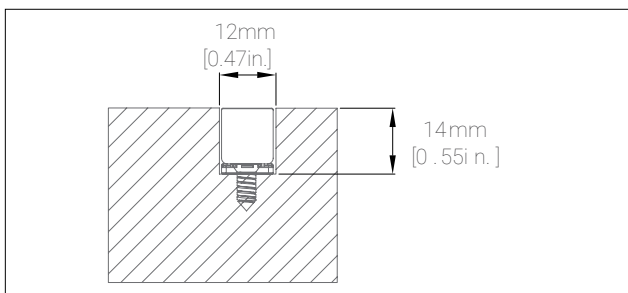

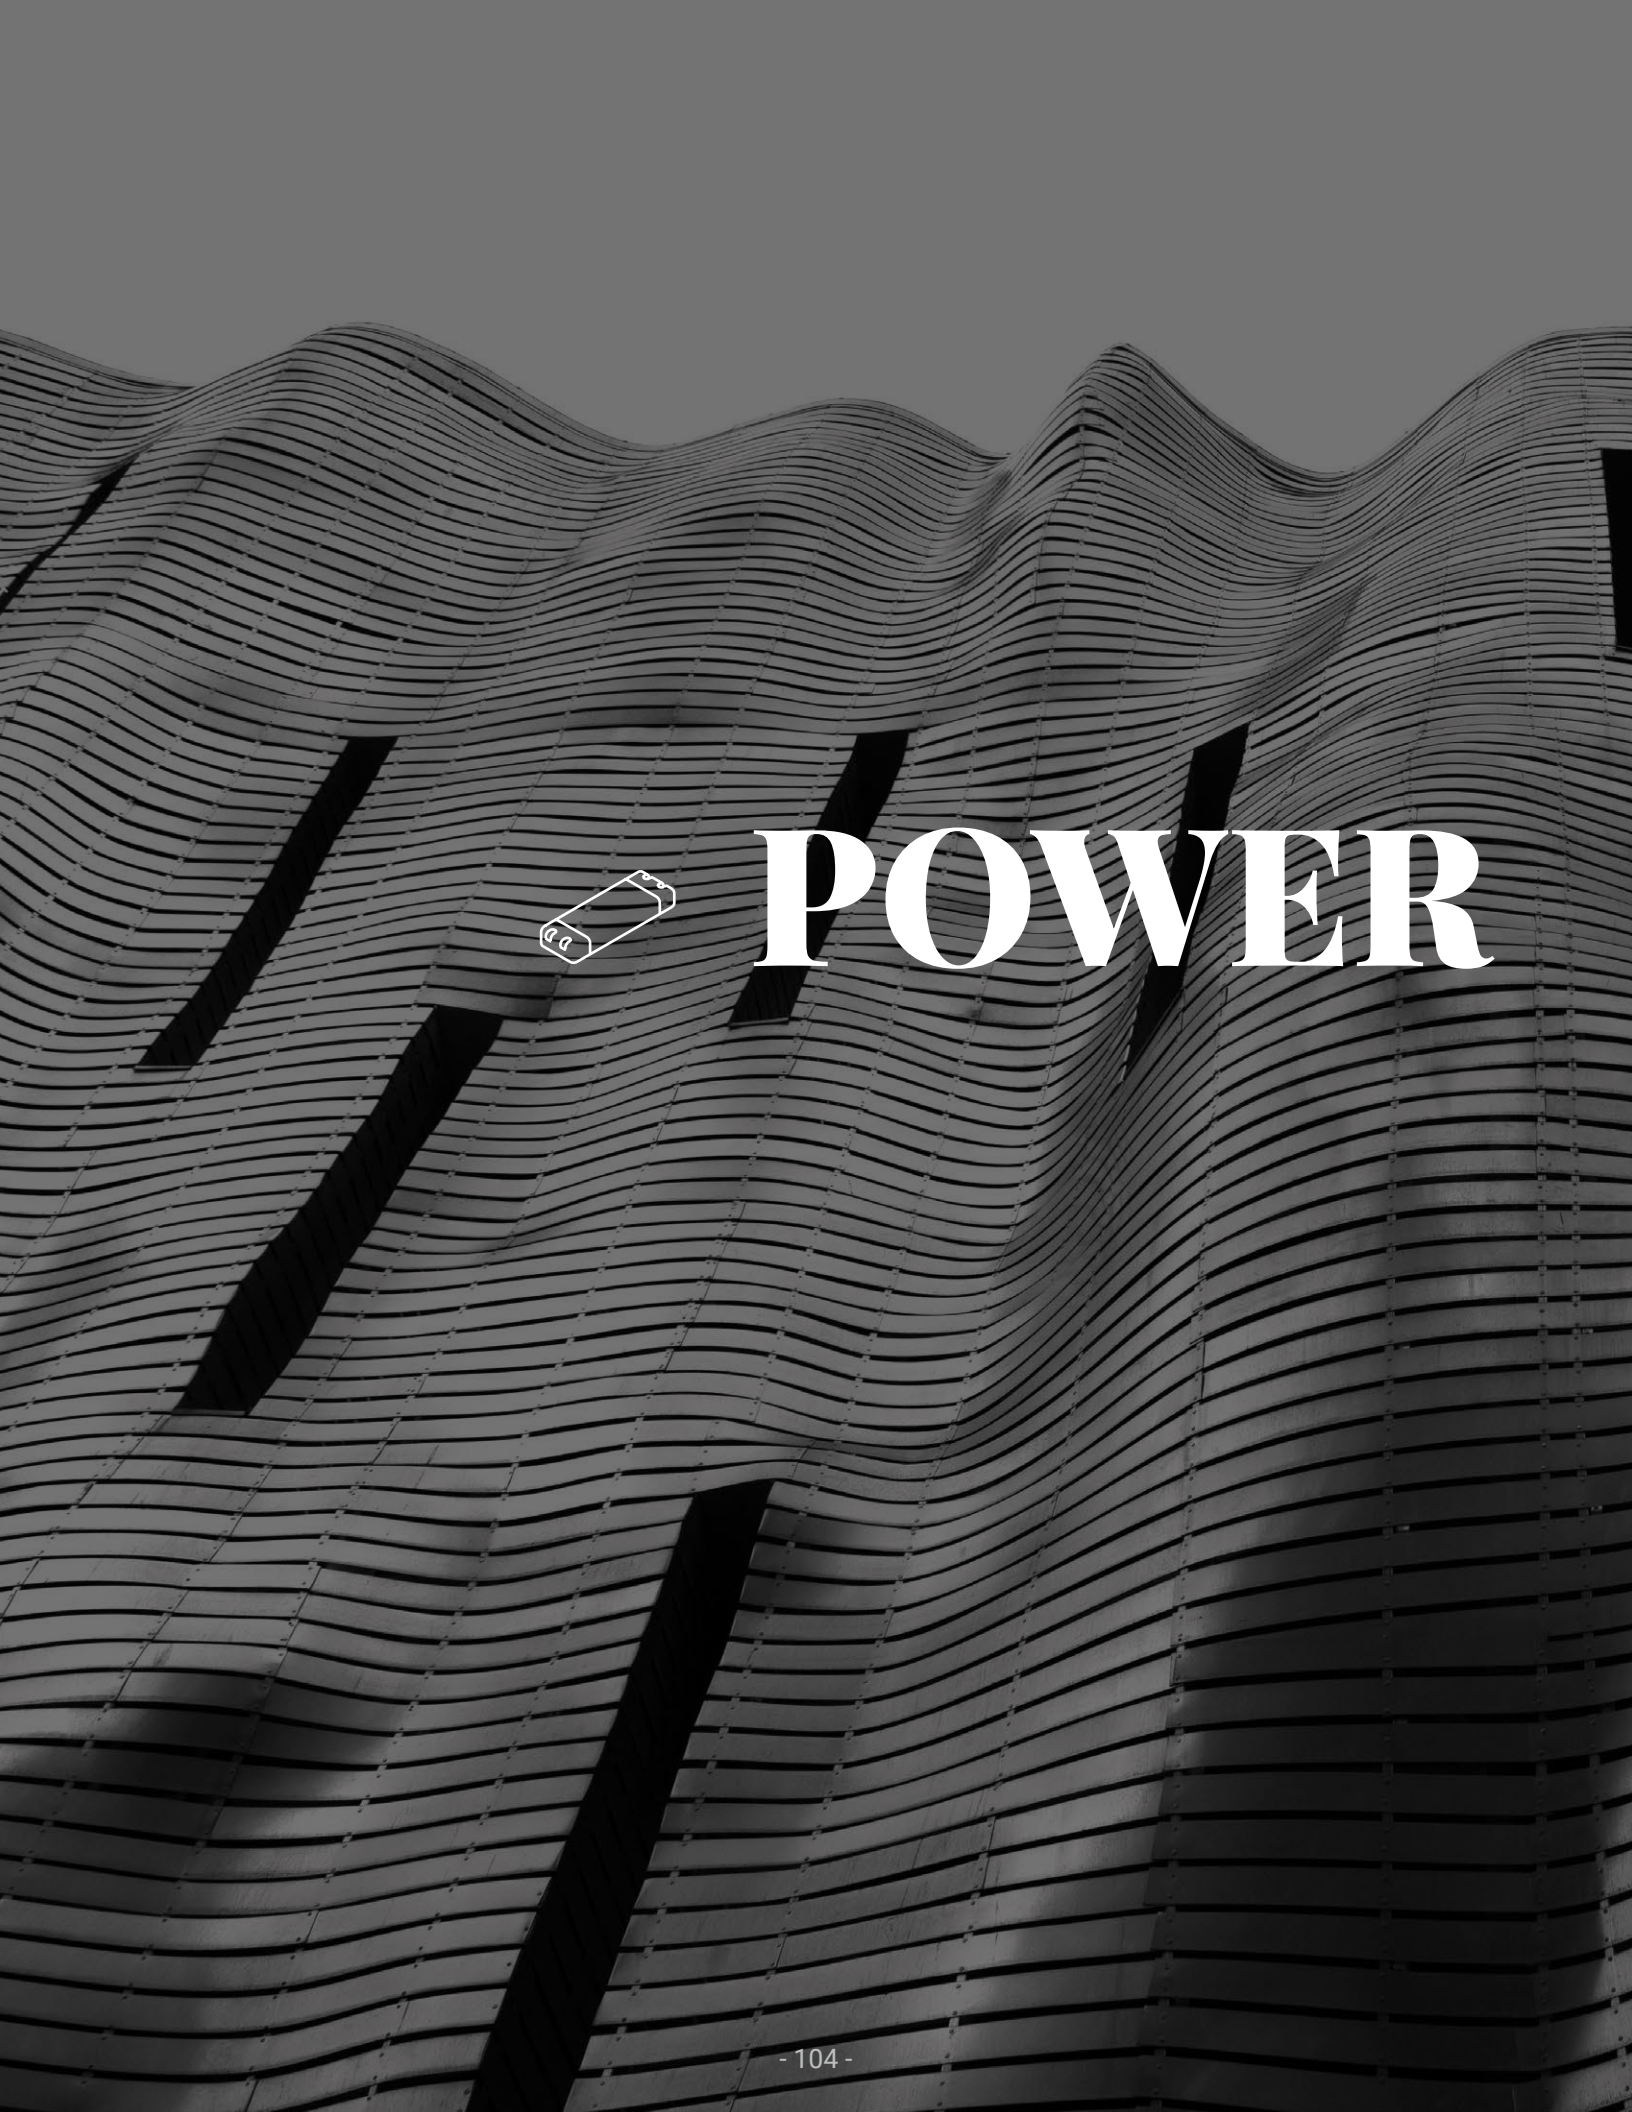

POWER

DIMMABLE

Triac / 0-10V / 1-10V / 10V PWM / Potentiometer (5 in 1)

Dimmable LED Driver.

JLM-XX-24-JP2

Triac/0-10V/Potentiometer Dimmable LED Driver

- With Junction Box




Model Name	Output	Input	Certificate	Size	Net Weight	Location
JLM-30-24-JP2	24V, 1.25A	100-277 VAC	UL, cUL, FCC, Class 2, ROHS	165×92×41mm	0.95kg	Dry, Damp, Wet
JLM-60-24-JP2	24V, 2.5A		UL, cUL, FCC, Class 2, ROHS	188×92×41mm	1.1kg	Dry, Damp, Wet
JLM-96-24-JP2	24V, 4A		UL, cUL, FCC, Class 2, ROHS	220×93×41mm	1.3kg	Dry, Damp, Wet
JLM-192-24-JP2 (MULTI 2×96W)	24V, MULTI 2×4A		UL, cUL, FCC, Class 2, ROHS	278×108×46mm	1.8kg	Dry, Damp, Wet
JLM-288-24-JP2 (MULTI 3×96W)	24V, MULTI 3×4A		UL, cUL, FCC, Class 2, ROHS	301×108×46mm	2.3kg	Dry, Damp, Wet

No Junction Box



30-60W

96-288W

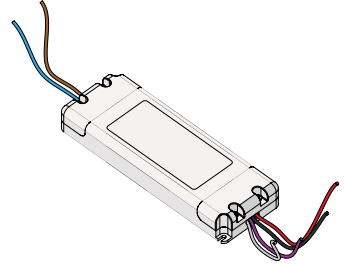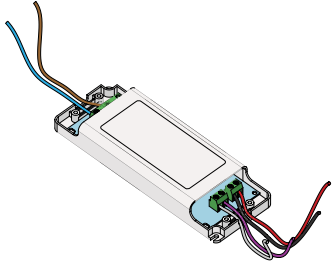
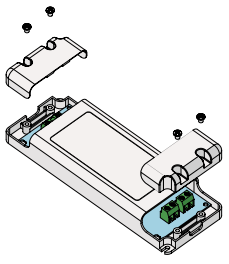


JLM-XX-24-NJ2

Triac/0-10V/Potentiometer Dimmable LED Driver

- No Junction Box (This product is intended for limited types of canopies)

Model Name	Output	Input	Certificate	Size	Net Weight	Location
JLM-30-24-NJ2	24V, 1.25A	100-277 VAC	UL, cUL, FCC, Class 2, ROHS	155x54x20mm	0.21kg	Dry, Damp
JLM-60-24-NJ2	24V, 2.5A		UL, cUL, FCC, Class 2, ROHS	178x61x24mm	0.35kg	Dry, Damp
JLM-96-24-NJ2	24V, 4A		UL, cUL, FCC, Class 2, ROHS	230x70x43mm	1.05kg	Dry, Damp, Wet
JLM-192-24-NJ2 (MULTI 2x96W)	24V, MULTI 2x4A		UL, cUL, FCC, Class 2, ROHS	278x78x47mm	1.7kg	Dry, Damp, Wet
JLM-288-24-NJ2 (MULTI 3x96W)	24V, MULTI 3x4A		UL, cUL, FCC, Class 2, ROHS	301x78x47mm	1.9kg	Dry, Damp, Wet

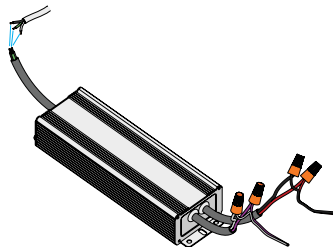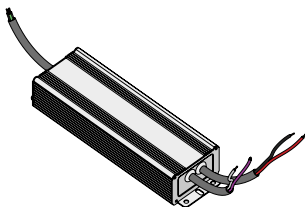


Compatible Dimmer List

JLM Series Triac-Dimmable Function						
Dimmer Brand	Model number (Dimmer)	Input Voltage	Dimming Range	Forward Phase or Reverse Phase	Compatible Driver(Series)	Remark
Lutron	MACL-153MH-LA	120V	20-100%	Forward Phase	JLM Series	Dimmer with spin button (adjust min. dimming 0-30%)
	SCL-153PR-WH	120V	0-100%	Forward Phase	JLM Series	
	DVCL-153PR-WH	120V	0-100%	Forward Phase	JLM Series	
	CTCL-153PDH-LA	120V	0-100%	Forward Phase	JLM Series	
	TGCL-153PR-WH	120V	0-100%	Forward Phase	JLM Series	
Leviton	VPI06-1LZ	120V	15-100%	Forward Phase	JLM Series	
	TTI06	120V	1-100%	Forward Phase	JLM Series	
	6602	120V	0-100%	Forward Phase	JLM Series	
	6672	120V	20-100%	Forward Phase	JLM Series	
	DZ6HD	120V	17-100%	Forward Phase	JLM Series	
Legrand	RHCL453PNICCV6	120V	6-100%	Forward Phase	JLM Series	
	WSCL450TCCCV4	120V	11-100%	Forward Phase	JLM Series	
	LSCL453PLACCV4	120V	11-100%	Forward Phase	JLM Series	
Crestron	CLW-DELVEX-P-W-S	120V	11-100%	Reverse Phase	JLM Series	


Lutron Dimmer:     
 MACL-153MH-LA SCL-153PR-WH DVCL-153PR-WH CTCL-153PDH-LA TGCL-153PR-WH



Leviton Dimmer:     
 VPI06-1LZ TTI06 6602 6672 DZ6HD

Legrand Dimmer:   
 RHCL453PNICCV6 WSCL450TCCCV4 LSCL453PLACCV4

Creston Dimmer: 
 CLW-DELVEX-P-W-S

JLM Series-0-10V Dimmable Function						
Dimmer Brand	Model number (Dimmer)	Input Voltage	Dimming Range	Match	Compatible Driver (Series)	Remark
Arrow Hart	DF10P-C1	120-277V	5-100%	OK	JLM Series	Dimmer with spin button (adjust max. dimming)
Lutron	DVSTV-WH	120-277V	9-100%	OK	JLM Series	Dimmer with spin button (adjust min. dimming 9%-25%)
	DVTV-WH	120-277V	9-100%	OK	JLM Series	

Arrow Hart Dimmer: 
 DF10P-C1

Lutron Dimmer:  
 DVSTV-WH DVTV-WH





NON-DIMMABLE

Non-Dimming LED Driver Series (PFC EMC, high power factor)

With Junction Box



30-288W

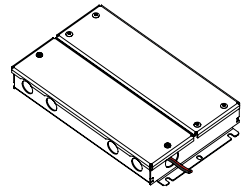

JLN-XX-24-JP2

Non-Dimmable LED Driver

- With Junction Box




Model Name	Output	Input	Certificate	Size	Net Weight	Location
JLN-30-24-JP2	24V, 1.25A	100-277 VAC	UL, cUL, FCC, CE, ROHS	165×92×41mm	0.95kg	Dry, Damp
JLN-60-24-JP2	24V, 2.5A		UL, cUL, FCC, CE, ROHS	188×92×41mm	1.1kg	Dry, Damp
JLN-96-24-JP2	24V, 4A		UL, cUL, FCC, CE, ROHS	220×93×41mm	1.3kg	Dry, Damp
JLN-192-24-JP2 (MULTI 2×96W)	24V, MULTI 2×4A		UL, cUL, FCC, CE, ROHS	278×108×46mm	1.8kg	Dry, Damp, Wet
JLN-288-24-JP2 (MULTI 3×96W)	24V, MULTI 3×4A		UL, cUL, FCC, CE, ROHS	301×108×46mm	2.2kg	Dry, Damp, Wet



30-60W

96-288W

No Junction Box

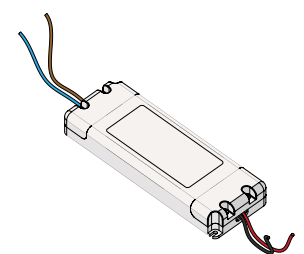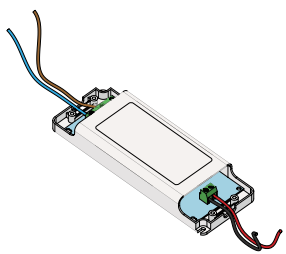
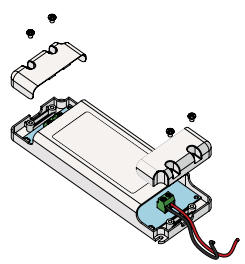


JLN-XX-24-NJ2

Non-Dimmable LED Driver

- No Junction Box (This product is intended for limited types of canopies)

Model Name	Output	Input	Certificate	Size	Net Weight	Location
JLN-30-24-NJ2	24V, 1.25A	100-277 VAC	UL, cUL, FCC, CE, ROHS	155×54×20mm	0.21kg	Dry, Damp
JLN-60-24-NJ2	24V, 2.5A		UL, cUL, FCC, CE, ROHS	178×61×24mm	0.35kg	Dry, Damp
JLN-96-24-NJ2	24V, 4A		UL, cUL, FCC, CE, ROHS	230×70×43mm	1.1kg	Dry, Damp, Wet
JLN-192-24-NJ2 (MULTI 2×96W)	24V, MULTI 2×4A		UL, cUL, FCC, CE, ROHS	278×78×47mm	1.5kg	Dry, Damp, Wet
JLN-288-24-NJ2 (MULTI 3×96W)	24V, MULTI 3×4A		UL, cUL, FCC, CE, ROHS	301×78×47mm	1.9kg	Dry, Damp, Wet

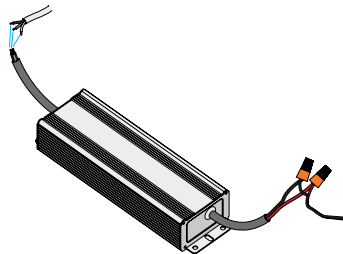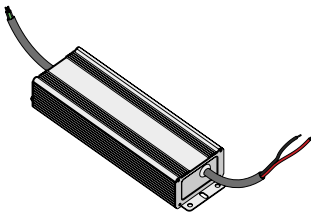

Contact Us

647-496-8107 (CA)
1-877-849-1942 (US)


www.joyolight.ca

info@joyolight.com

#12, 5200 Dixie Rd,
Mississauga, ON, Canada
L4W 1E4

Follow Us

[instagram.com/joyolight](https://www.instagram.com/joyolight)





JOYOLIGHT GROUP INC.